



RECEIVED  
JUL 21 2003  
GROUP 1700  
IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

PATENT

10/3  
#20  
7/25/03  
[Signature]

In re Application of:	John Chen and Lixiao Wang Yiqun Wang and Albert C. C. Chin
Application No.:	09/696378
Filed:	October 25, 2000
For:	DIMENSIONALLY STABLE BALLOONS
Examiner:	Sow-Fun Hon
Group Art Unit:	1772

RECEIVED  
MAY 27 2003  
TC 1700

Mail Stop Appeal Brief-Patents  
Commissioner for Patents  
P.O. Box 1450  
Alexandria, VA 22313-1450

Docket No.: S63.2-9503-US01

### BRIEF ON APPEAL

This is a Brief on Appeal for the above-identified application in which claims 1-26 and 31-36 were finally rejected in an Office Action mailed November 21, 2002. A Notice of Appeal was filed in this case on March 20, 2003. The fees required under §1.17(f) and any required petition for extension of time for filing this brief therefor are dealt with in the accompanying Transmittal of Appeal Brief. This brief is transmitted in triplicate in accordance with 37 C.F.R. §1.192(a).

#### (1) Real Party in Interest

The application is assigned to SciMed Life Systems, Inc., One SciMed Place, Maple Grove, MN 55311-1566, a Minnesota Corporation and a subsidiary of Boston Scientific Corporation, One Boston Scientific Place, Natick, Massachusetts, 01760-1537, a Delaware Corporation.

05/23/2003 WABDELRI 00000064 09696378 320.00 09  
01 FC:1402

**(2) Related Appeals and Interferences**

No related appeals or interferences are pending.

**(3) Status of Claims**

Claims 1-26 and 31, 33, 36 are pending in the application. Claims 1-26 and 31, 33 and 36 are reproduced in Appendix A, have been finally rejected and are the subject of this appeal.

**(4) Status of Amendments**

All amendments made to date have been entered.

**(5) Summary of the Invention**

The present application is generally directed to a stent delivery balloon composed of a micro-composite material which includes a longitudinal fibril structure that is either parallel to the longitudinal axis of the balloon structure, or that is diagonal to the longitudinal axis at the molecular level of the balloon. The orientation of the fibril structure can limit longitudinal expansion of the balloon and allow the balloon to expand radially as desired, but minimally, or not at all in the longitudinal direction if the fibrils are parallel to the balloon axis. When the fibrils are oriented diagonally about the axis, they can limit both longitudinal and radial expansion of the balloon when inflated.

The micro-composite material is made up of a combination of a fibril component, a polymeric balloon material which acts as a matrix, and optionally a compatibilizer material which may act to create a less distinctive phase boundary between the fibril and matrix components, but which does not solubilize the LCP polymer in the matrix at human body temperature.

Although such materials have been employed for catheter *tubing*, such material has not been known for use in the construction of catheter *balloons* which exhibit minimal or no longitudinal growth during balloon expansion but which expands as desired in the radial direction, or that exhibit minimal expansion both in the longitudinal and radial directions.

The invention of claim 1 is directed to a dimensionally stable polymer balloon having a longitudinal axis and composed of a micro-composite material, the micro-composite material including a polymer matrix component and a polymer fibril component distributed in the polymer matrix component, the fibril component having micro-fibers oriented substantially parallel or diagonally to the longitudinal axis of the balloon.

The invention of claim 8 is directed a polymer balloon as in claim 1 wherein the micro-composite material further includes a compatibilizer component.

The invention of claim 9 is directed to a polymer balloon as in claim 8 wherein the compatibilizer is a block copolymer.

The invention of claim 10 is directed to a polymer balloon as in of Claim 8 wherein said compatibilizer is selected from the group consisting of copolyester elastomers, ethylene unsaturated ester copolymers, copolymers of ethylene and a carboxylic acid or derivative thereof, polyolefins or ethylene-unsaturated ester copolymers grafted with functional monomers, copolymers of ethylene and a carboxylic acid or derivative thereof, terpolymers of ethylene, copolymers of unsaturated esters and carboxylic acids or derivatives thereof, maleic acid grafted styrene/ethylene-butadiene-styrene block copolymers, acrylic elastomers, glycidyl(meth)acrylates, ionomeric copolymers, polyester-polyether block copolymers, and mixtures thereof.

The invention of claim 11 is directed to a polymer balloon as in claim 1 wherein the compatibilizer is an ethylene-maleic anhydride copolymer, an ethylene-methyl acrylate copolymer, an ethylene-methyl acrylate-maleic anhydride terpolymer, an ethylene- methyl acrylate-methacrylic acid terpolymer, an alkyl(meth)acrylate-ethylene-glycidyl(meth)acrylate terpolymer, or a mixture thereof.

The invention of claim 16 is directed to a polymer balloon as in claim 1 wherein the fibril component has a melting point of about 250° C or less.

The invention of claim 17 is directed to a polymer balloon as in claim 1 wherein the fibril component has a melting point of about 150° to about 249° C.

The invention of claim 18 is directed to a polymer balloon as in claim 1 wherein the fibril component has a melting point of about 230° C or less.

The invention of claim 31 is directed to an inflatable medical balloon having a circumference and a longitudinal axis including a semi-compliant matrix having a plurality of individual fiber cores mixed therethrough. The cores are evenly distributed about the circumference of the balloon and are composed of one or more materials which are characterized as being stronger than the matrix material and having a bulk elongation less than the matrix material when the one or more materials are oriented in the direction of the longitudinal axis, and the matrix material and the core material operatively adhering to one another.

The invention of claim 33 is directed to a medical balloon as in claim 31 that expands less than 5% beyond the pre-inflation state.

**(6) Issues**

I. Whether the Examiner erred in rejecting claims 1-8, 12-26, 31, 33 and 36 under 35 U.S.C. §103(a) as being obvious over LeVeen et al. (US 4,448,195) in view of Zdrahala.

II. Whether the Examiner erred in rejecting claims 9-11 under 35 U.S.C. §103(a) as being unpatentable over LeVeen et al. in view of Zdrahala as applied to claims 1-8, 12-26, 31, 33 and 36, and further in view of Cozewith et al.

**(7) Grouping of Claims**

For issue I, claims 1-8, 12-15, 19, 20-26 and 36 stand or fall together.

For issue I, claims 16-18 stand or fall together.

For issue I, claim 31 stands or falls alone.

For issue I, claim 33 stands or falls alone.

For issue II, claim 9 stands or falls alone.

For issue II, claims 10-11 stand or fall together.

**8) Argument**

*I. The Examiner erred in rejecting claims 1-8, 12-26, 31, 33 and 36 under 35 U.S.C. §103(a) as being obvious over LeVeen et al. (US 4,448,195) in view of Zdrahala.*

*A. Claims 1-8, 12-15, 19, 20-26, and 36.*

Claim 1 is representative. Claim 1 is directed to a dimensionally stable polymer balloon having a longitudinal axis and composed of a micro-composite material, the micro-composite material including a polymer matrix component and a polymer fibril component distributed in the polymer matrix component, the fibril component having micro-fibers oriented substantially parallel or diagonally to the longitudinal axis of the balloon.

In the Final Action it was asserted that LeVeen et al. has a balloon catheter wherein the balloon and catheter are a one piece unit with the balloon being a thin catheter wall portion of exact shape and size, and that it can be formed by expanding a distal tube portion of the catheter and that LeVeen et al. teaches that the catheter may be formed by blow molding tubing with fine fibers, but fails to teach that the fibers are polymeric or the orientation of the fibers.

The Examiner cites Zdrahala as teaching extruded catheter tubing of LCP polymer fibers in a matrix polymer. In the last paragraph on page 3, the Final Action asserts that Zdrahala teaches that the tube may be extruded with no relative rotation between orifice and mandrel, but with stretching imposed by orienting the apparatus, with the result that the fibrils of such tubing are generally parallel to the tubing axis where such a structure tends to have relatively high longitudinal stiffness, which means that the longitudinal elongation of the catheter section would be minimal, and precludes longitudinal expansion of 5% beyond the original pre-inflation state. The Examiner goes on to assert that it would have been obvious to one of ordinary skill in the art to have used the catheter tubing of Zdrahala for one-piece balloon catheter in the invention of LeVeen et al. in order to obtain a balloon catheter with the desired longitudinal stiffness for facilitating advancement through small arteries and veins.

Appellants disagree.

The Examiner has clearly misread LeVeen et al.

LeVeen et al. teaches a one piece balloon catheter which is formed by blow molding an elongated polyurethane tube so that one section of the tube has a thinned cross sectional balloon area between the distal end of the tube which is sealed and its open proximal

end. The balloon portion which is positioned adjacent the distal end has a thinner cross sectional area which allows a balloon to be formed if a fluid is introduced into the catheter. The Examiner has cited col. 1, lines 5-50, in asserting that LeVeen et al show a fiber-containing balloon. The closest statement which can be found is the following:

The catheter and balloon are a one piece unit with the balloon being a thin catheter wall portion of exact shape and size. *The catheter may be formed by blow molding tubing with a fibrous reinforcement of woven glass or fine fibers of other materials.* The woven fiber structure is placed over a polyurethane extruded plastic tubing which is heated and the blown outward into a mold. The molded polyurethane is then fused with the reinforcement fiber during this procedure.

Col. 1, lines 44-54

Perhaps the Examiner reasons that the balloon portion of the catheter is the same as the shaft portions. Perhaps the Examiner has misinterpreted LeVeen et al. because of the discussion of blow molding, and has confused the catheter shaft and balloon portions. Either way, the Examiner is incorrect. LeVeen et al go on to expressly teach omitting the fiber component from the portion of the tubing which is used to form the balloon. Hence an inference that the catheter shaft and balloon portions are the same is wrong. Moreover, the mention of blow molding does not suggest to reinforce the balloon. In fact the catheter shaft is blow molded into the reinforcing material.


LeVeen et al. expressly omit the fiber component from the thinned portion of the catheter which forms the balloon. In particular, at Col. 2, lines 42-59, the patent states:

The portion 12 is thinned so that when a fluid 14 is introduced under pressure into the tubular catheter, a balloon 16 will form in the thinned portion 12. The tubular catheter 10 may be formed by sealing a distal end 15 of a polyurethane extruded tubing and placing the tubing within a mold lined with a reinforcement netting structure 110, preferably of woven glass fibers. *The mold M partially shown in phantom in FIG. 5 includes a wider portion 50 adjacent the sealed distal portion 15 of the tube where the reinforcement lining structure is omitted.* The tubing is heated and blown outward to fuse with the reinforcement glass fiber structure, as well as to create a thinned out portion 12 of a size

and position corresponding to that of the wider portion of the mold described above. The balloon portion thus is thinned with respect to the other portions of the tube and has an exact shape and size. (emphasis added)

The portion from which the netting structure is omitted in Fig. 5 is the portion which forms the balloon. Hence the catheter is formed by blow molding tubing with a fibrous reinforcement of woven glass or fine fibers of other materials, but the integral balloon has no such reinforcement.

Figures 5 and 6, shown below also clearly depict the balloon as free of the reinforcement material:

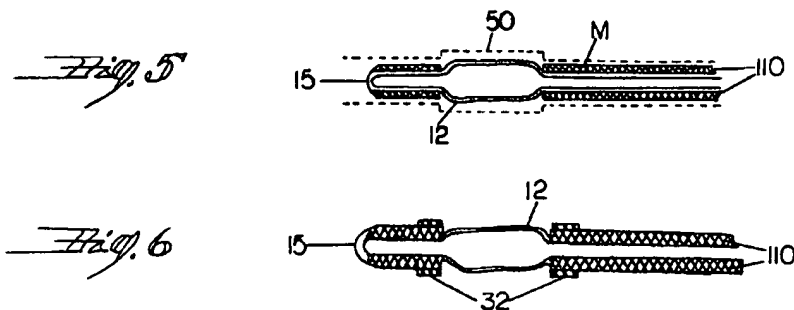

The LeVeen et al patent also contains this further teaching:

While the **balloon 16 is without reinforcement**, it is also constrained by the occlusion 100 and will not expand to the point where the tensile strength of the balloon 12 equals the tension thereon. (emphasis added, col. 3, lines 29-39)

Thus, the Examiner's interpretation is flawed.

LeVeen et al teaches the opposite of the Examiner's position. Instead of suggesting the invention, LeVeen et al. actually teaches away from the invention. If someone were to fashion an integral balloon catheter using catheter tubing as described in Zdrahala, LeVeen et al clearly teaches to omit the fiber in the portion of the tubing which would form the balloon.



No *prima facie* case of obviousness has been made out. Neither Zdrahala nor LeVeen et al. teach a balloon. Thus, the combination of references is lacking a most important element of the present claims, i.e. the polymer *balloon* as taught and claimed in the present application. Consequently, at least for this reason the rejection of claims 1-8, 12-15, 19, 20-26 and 36 should be reversed.

**B. Claims 16-18**

Claims 16-18 are patentable over LeVeen et al. in view of Zdrahala for at least the reasons that claim 1 is patentable (*i.e.* that LeVeen et al has been misinterpreted), and also for the reason that the use of low melting point fibril components recited in these claims are not taught or suggested in either document.

Claim 16 is directed to an embodiment of a polymer balloon in which the fibril component has a melting point of about 250°C or less. Claim 17 is directed to an embodiment in which the polymer balloon includes a fibril component having a melting temperature of about 150°C to about 249°C. Claim 18 is directed to an embodiment in which the polymer balloon includes a fibril component having a melting point of 230°C or less. Lower melting temperatures are advantageous because they require lower processing temperatures which are beneficial both from a personal safety perspective, are less detrimental to polymer properties during processing, and are more economical.

The liquid crystal polymers disclosed by Zdrahala have melting temperatures which are higher than those embodiments found in claims 16-18. Indeed, Zdrahala does not teach a fibril component having a melting point less than 280°C. For example, VECTRA®

B950, disclosed at col. 6, lines 48-49, has a melting point of 280°C.<sup>1</sup> Appellants submit that it is in fact *unusual* for these types of polymers to have melting temperatures of less than 280°C.

Appellants are also submitting in Appendix B, references illustrating that the polymers sold under the tradename of both VECTRA® and XYDAR® generally have higher melting temperatures than those of the fibril component recited in claims 15-18. Therefore, the rejection of claims 16-18 should be reversed for at least the reasons that LeVeen et al has been misread and further because the compositions of Zdrahala do not include a fibril component having a melting point as low as recited in these claims.

*C. Claim 31*

Claim 31 is directed to a medical balloon formed from a combination of a semi-compliant matrix material and a plurality of individual fibril cores distributed evenly about the circumference of the balloon. See application, page 6, line 29-page 7, line 22. The embodiment of claim 31 therefore requires both a particular type of matrix material and a non-random distribution of the fibril cores.

Claim 31 is seen to be patentable over the combination of LeVeen et al and Zdrahala for the same reason that claim 1 is patentable (*i.e.* that LeVeen et al has been misread), and also because Zdrahala does not teach or suggest the structured composition as recited.

Zdrahala, which is relied upon for the composition, does not show evenly spaced cores, nor does it teach or suggest the specific combination of such cores with a semi-compliant matrix material. The Zdrahala matrix materials cover a range of compliance, including materials

---

<sup>1</sup> Heino et al., US Patent No. 6,221,962 B1; Baird, US Patent No. 5,834,560

which can be characterized as semi-compliant,<sup>2</sup> but unlike the embodiment found in claim 31 of the present application, Zdrahala fails to teach or suggest employing a certain compliance material in combination with a plurality of individual fibril cores evenly distributed about the circumference of the balloon.

Thus, the combination of references does not suggest the specific combination of materials found in claim 31 of the present application for use in a polymer balloon. Therefore, even if the combination of LeVeen et al. and Zdrahala was a viable rejection of claim 1, the combination would not create a *prima facie* case of obviousness with respect to claim 31 and its dependents.

*E. Claim 33*

Claim 33 depends from claim 31 and is seen as being patentable for the same reasons already described for claim 31. Additionally, the recitation of the balloon longitudinal expansion rate of less than 5% is not taught or suggested in either reference.

In this particular, Appellants note that the longitudinal expansion property of a balloon is quite different than that of catheter tubing. Balloons have different wall thicknesses and undergo different processing than catheter tubing. Consequently, a skilled person does not know what longitudinal expansion would be obtained using a material for catheter tubing to form a balloon both because the balloon is further processed beyond what tubing is, and because the wall thickness of a balloon is thinner. Thus, the longitudinal expansion of a balloon would not

---

<sup>2</sup> See, for example, U.S. Patent Nos. 6,406,457; 6,171,278; 6,146,356; 5,951,941; 5,830,182; 5,556,383; 5,500,181; 5,447,497; 5,403,340; 5,348,538

be predictable from catheter tubing. Longitudinal expansion with respect to balloons is discussed in the Background at page 1 of the present specification.

Neither LeVeen et al., which describes an unreinforced balloon, nor Zdrahala, which is directed to catheter tubing, provide any direction as to a balloon having the expansion characteristics recited in this claim.

Thus, Appellants submit that the rejection of claim 33 should be reversed for the reasons given for claim 31 and also for the reason that a balloon having the longitudinal expansion property of this claim is not taught or suggested by the cited references.

*II. The Examiner erred in rejecting claims 9-11 under 35 U.S.C. §103(a) as being unpatentable over LeVeen et al. in view of Zdrahala as applied to claims 1-8, 12-26, 31, 33 and 36, and further in view of Cozewith et al.*

*A. Claim 9*

Claim 9 of the present invention is directed to a polymer balloon composed of a micro-composite material including a polymer matrix component, a polymer fibril component and a block copolymer compatibilizer. In the present specification, it is stated at page 2, lines 27-31 that the compatibilizer is employed to create a less distinctive phase boundary between the fibril and matrix components, but not to solubilize the LCP polymer in the matrix at human body.

Claims 9-11 were finally rejected in the Office Action mailed November 21, 2002 under 35 U.S.C. §103(a) as being unpatentable over LeVeen et al. in view of Zdrahala as applied to claims 1-8, 12-26, 31, 33 and 36 above, and further in view of Cozewith et al. In the final

Office Action it is asserted that LeVeen et al. teaches a catheter balloon with reinforcing fibers, but fails to teach the compatibilizer. It is further asserted by the Examiner that Zdrahala teaches catheter tubing wherein the liquid crystal polymer ingredient may be desirably semi-compatible with the particular structural plastic matrix (column 5, lines 35-40) and that the blended composition may include block copolymers such as copolyester elastomers, polyolefins and copolymers of ethylene with acrylates (column 4, lines 15-30) and the specific use of compatibilizers (surfactants)(column 5, lines 20-35)), but that Zdrahala fails to teach that any block copolymer in the blend is specifically a compatibilizer.

As an initial matter it is noted that the rejection of claims 9-11, like that of claim 1, relies on the same misinterpretation of the LaVeen et al reference. No assertion is made that Cozewith et al teaches or suggests catheter balloon with reinforcing fibers. Consequently, this rejection must be reversed at least for the reason that the LeVeen et al document does not teach or suggest a catheter balloon with reinforcing fibers.

The Final Office Action mailed November 21, 2003, asserted at page 5:

Because Cozewith et al. disclose that it is well known in the art to use block copolymers as compatibilizers for emulsifying polymer/polymer blends, it would have been obvious to one of ordinary skill in the art at the time of the invention to have used a block copolymer taught by Zdrahala [*sic*] as the compatibilizer in the catheter tubing of Zdrahala, in order to use the catheter tubing of Zdrahala as the catheter balloon tubing in the invention of LeVeen et al., such that a balloon catheter with the desired compatibility between matrix and fiber and thus the desired constrained inflation and longitudinal stiffness is obtained.

Appellants disagree.

Zdrahala suggests that *surfactants* may be employed as additives in the catheter tubing compositions, but leaves it to the reader to determine what their purpose would be:

Other ingredients or additives may be provided to accomplish any desired purpose such as internal lubricants, pigments, radiopaque agents, surfactants, and the like.

(col. 5, lines 25-28)

Nothing is said here suggesting that the surfactants are block copolymers or that they are to be used for polymer compatibilization. In fact, Zdrahala prefers phase incompatibility. (Col. 7, lines 32-36.) Moreover, Zdrahala's mention of block copolymers is in a general listing of matrix resins (col. 4, lines 17-31 HYTREL® and PEBAX®), and the block copolymer character of these resins is not mentioned. Consequently, absent impermissible hindsight, the passing reference to surfactants cannot be considered a suggestion to employ a block copolymer compatibilizer between the matrix and the fiber as argued in the Final Action.

Cozewith et al., US 5733980, describes block polymers containing both crystalline and elastomeric blocks. Both blocks are olefin or diene polymer segments, unlike the block copolymer resins mentioned in Zdrahala. The Cozewith et al block copolymers may be used as a lubricant or fuel additive, as a plastics blend component, in bitumen blends, as a component in hot melt adhesives and as a component of roof sheeting compounds. While Cozewith et al. do mention that block copolymers generally are known for use as compatibilizers, (column 1, lines 17-23), they do not describe block copolymer performance as a compatibilizer in relation to any polymer composition of a liquid crystal polymer. Furthermore, Cozewith et al. make no suggestion to employ the compositions described therein for the manufacture of medical devices. Consequently, there is no suggestion or motivation provided in this document to employ a block copolymer compatibilizer between the matrix and the fiber as argued in the Final Action.

Because the rejection of claim 9 relies on an incorrect reading of the LeVeen et al reference, and further because the combination of references does not teach or suggest using a block copolymer compatibilizer in a balloon formulation, the rejection of claim 9 should be reversed.

*B. Claims 10-11*

Claims 10 and 11 of the present application depend from claim 9 and are patentable at least for the reasons given for claim 9. Furthermore, claims 10 and 11 are directed to specific types of compatibilizers, none of which are described in Cozewith et al. Therefore, combining Cozewith et al. with Zdrahala and LeVeen et al. does not lead one of skill in the art to any of the specific compatibilizers of claims 10 and 11.

Because the rejection of claims 10 and 11 relies on an incorrect reading of the LeVeen et al reference, and further because the combination of references does not teach or suggest using a block copolymer compatibilizer in a balloon formulation, and further because the combination of references does not lead one to employ the resins recited in claims 10 and 11 as compatibilizers in a balloon polymer formulation, the rejections of claims 10 and 11 should be reversed.

*IV. CONCLUSION*

By the foregoing arguments it has been demonstrated that claims 1-8, 12-26, 31, 33 and 36 are not obvious over LeVeen et al. (US 4,448,195) in view of Zdrahala; and that claims 9-11 are not obvious over LeVeen et al. in view of Zdrahala as applied to claims 1-8, 12-26, 31, 33 and 36, and further in view of Cozewith et al.

***Application No.: 09/696,378***  
***Filed: October 25, 2000***


***Brief on Appeal***  
***Page 16***

Respectfully submitted,

VIDAS, ARRETT & STEINKRAUS

Date: May \_\_\_\_, 2003

By:

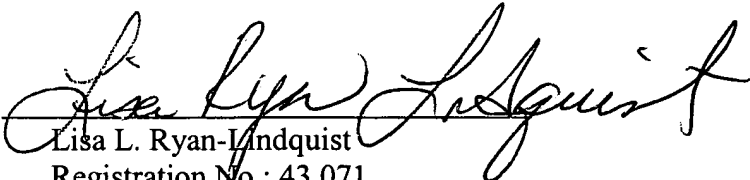  
Lisa L. Ryan-Lindquist  
Registration No.: 43,071

6109 Blue Circle Drive, Suite 2000  
Minnetonka, MN 55343-9185  
Telephone: (952) 563-3000  
Facsimile: (952) 563-3001


f:\wpwork\lrl\9503\_brf\_20030422.doc



Appendix A

CLAIMS ON APPEAL

1. A dimensionally stable polymer balloon having a longitudinal axis and composed of a micro-composite material, the micro-composite material comprising a polymer matrix component and a polymer fibril component distributed in the polymer matrix component, the fibril component having micro-fibers oriented substantially parallel or diagonally to the longitudinal axis of the balloon.
2. The dimensionally stable polymer balloon of claim 1 mounted on a catheter.
3. The dimensionally stable polymer balloon of claim 1, wherein said micro-composite material comprises about 0.1 wt-% to about 20 wt-% of said fibril component.
4. The dimensionally stable polymer balloon of claim 1, wherein said micro-composite material comprises about 0.5 wt-% to about 8 wt-% of said fibril component.
5. The dimensionally stable polymer balloon of claim 1, wherein said micro-composite material comprises about 0.5 wt-% to about 15 wt-% of said fibril component.
6. The dimensionally stable balloon of claim 1, wherein said micro-composite material comprises about 50 wt-% to about 99.9 wt-% of said polymer matrix component.
7. The dimensionally stable balloon of claim 1, wherein said micro-composite material comprises about 85 wt-% to about 99.5 wt-% of said polymer matrix component.
8. The dimensionally stable balloon of claim 1, wherein the micro-composite material further comprises a compatibilizer component.
9. The dimensionally stable balloon of claim 8 wherein said compatibilizer is a block copolymer.
10. The dimensionally stable balloon of Claim 8 wherein said compatibilizer is selected from the group consisting of copolyester elastomers, ethylene unsaturated ester copolymers, copolymers of ethylene and a carboxylic acid or derivative thereof, polyolefins or ethylene-unsaturated ester copolymers grafted with functional monomers, copolymers of ethylene and a carboxylic acid or derivative thereof, terpolymers of ethylene, copolymers of unsaturated esters and carboxylic acids or derivatives thereof, maleic acid grafted styrene/ethylene-butadiene-



styrene block copolymers, acrylic elastomers, glycidyl(meth)acrylates, ionomeric copolymers, polyester-polyether block copolymers, and mixtures thereof.

11. The dimensionally stable polymer balloon of claim 1, wherein said compatibilizer is selected from the group consisting of ethylene-maleic anhydride copolymers, ethylene-methyl acrylate copolymers, ethylene-methyl acrylate-maleic anhydride terpolymers, ethylene-methyl acrylate-methacrylic acid terpolymers, alkyl(meth)acrylate-ethylene-glycidyl(meth)acrylate terpolymers, and mixtures thereof.

12. The dimensionally stable balloon of claim 1, wherein the fibril component is composed of rigid-rod thermoplastic material.

13. The dimensionally stable balloon of claim 1, wherein the fibril component is composed of semi-rigid-rod thermoplastic material.

14. The dimensionally stable balloon of claim 1, wherein the fibril component is composed of liquid crystal polymer material.

15. The dimensionally stable balloon of claim 1, wherein the fibril component has a melting point of about 275° C or less.

16. The dimensionally stable balloon of claim 1, wherein the fibril component has a melting point of about 250° C or less.

17. The dimensionally stable balloon of claim 1, wherein the fibril component has a melting point of about 150° to about 249° C.

18. The dimensionally stable balloon of claim 1, wherein the fibril component has a melting point of about 230° C or less.

19. The dimensionally stable balloon of claim 1, wherein the matrix component comprises a semi-compliant thermoplastic polymer.

20. The dimensionally stable balloon of claim 1, wherein the matrix component has a melting point of about 140° C to about 265° C.

21. The dimensionally stable polymer balloon of claim 1, wherein the matrix component comprises a polyamide-polyester block copolymer, a polyamide/polyether/polyester block copolymer, a polyester-polyether block copolymer, or a mixture thereof.

22. The dimensionally stable polymer balloon of claim 1, wherein the matrix component has a melting point of about 150° C to about 230° C.

23. The dimensionally stable polymer balloon of claim 1, wherein the matrix component has a melting point of about 220° or less.

24. The dimensionally stable balloon of claim 1, wherein the micro-fibers are oriented substantially parallel to the longitudinal axis of the balloon.

25. The dimensionally stable balloon of claim 1, wherein the micro-fibers are oriented diagonally to the longitudinal axis of the balloon.

26. The dimensionally stable balloon of claim 1, wherein the orientation of the micro-fibers relative to the longitudinal axis of the balloon changes through the balloon material in a direction transverse to said longitudinal axis.

31. (Amended) An inflatable medical balloon having a circumference and a longitudinal axis comprising:

a matrix material, said matrix material characterized as being semi-compliant; and having a plurality of individual fiber cores mixed therethrough, said cores being evenly distributed about the circumference of the balloon and being composed of one or more materials which are characterized as being stronger than the matrix material and having a bulk elongation less than the matrix material when the one or more materials are oriented in the direction of the longitudinal axis, and the matrix material and the core material operatively adhering to one another.

33. The medical balloon of claim 31, wherein the balloon longitudinally expands less than 5% beyond the pre-inflation state.

36. The medical balloon of claim 31, wherein the balloon has a multilayer structure.

**Appendix B**

1. Ticona Vectra A950
2. Solvay Advanced Polymers Xydar G-930 Liquid Crystal
3. Ticona Vectra C550 Liquid Crystal Polymer (LCP), 50% Mine
4. Ticona Vectra B230 Liquid Crystal Polymer (LCP), 30% Carbon
5. Ticona Vectra A700 Liquid Crystal Polymer (LCP), 30% Glass
6. Ticona Vectra A625 Liquid Crystal Polymer (LCP), 25% Grapl
7. Ticona Vectra A540 Liquid Crystal Polymer (LCP), 40% Mine
8. Ticona Vectra A530 Liquid Crystal Polymer (LCP), 30% Mine
9. Ticona Vectra A515 Liquid Crystal Polymer (LCP), 15% Mine
10. Ticona Vectra A440 Liquid Crystal Polymer (LCP), Glass/PT
11. Ticona Vectra A435 Liquid Crystal Polymer (LCP), Glass/PT
12. Ticona Vectra A430 Liquid Crystal Polymer (LCP), LCP/PTF
13. Ticona Vectra A422 Liquid Crystal Polymer (LCP), Glass/Grap
14. Ticona Vectra A420 Liquid Crystal Polymer (LCP), Glass/Mineral
15. Ticona Vectra A410 Liquid Crystal Polymer (LCP), 25% Glass/25%
16. Ticona Vectra A230 Liquid Crystal Polymer (LCP), 30% Carbon Fil
17. Ticona Vectra V140 Liquid Crystal Polymer (LCP), 40% Glass
18. Ticona Vectra L130 Liquid Crystal Polymer (LCP), 30% Glass
19. Ticona Vectra K140 Liquid Crystal Polymer (LCP), 40% Glass
20. Ticona Vectra K130 Liquid Crystal Polymer (LCP), 30% Glass
21. Ticona Vectra E130i Liquid Crystal Polymer (LCP), 30% Glass

22. Ticona Vectra C150 Liquid Crystal Polymer (LCP), 50% Glass
23. Ticona Vectra C130 Liquid Crystal Polymer (LCP), 30% Glass
24. Ticona Vectra C115 Liquid Crystal Polymer (LCP), 15% Glass
25. Ticona Vectra B130 Liquid Crystal Polymer (LCP), 30% Glass
26. Ticona Vectra A150 Liquid Crystal Polymer (LCP), 50% Glass
27. Ticona Vectra A130 Liquid Crystal Polymer (LCP), 30% Glass
28. Ticona Vectra A115 Liquid Crystal Polymer (LCP), 15% Glass
29. Ticona General Products List
30. US 5,834,560 – Baird et al
31. Vectran HS LCP Fiber
32. Vectran M LCP Fiber

# Ticona


[Search](#)
[Company](#)
[Media](#)
[Investor Relations](#)
[Internet Policy](#)
[Contacts](#)
[Help](#)
[Product](#)
[Information](#)
[Markets/  
Applications](#)
[Technology  
& Services](#)
[Customer  
Center](#)
[Literature](#)
[MyTicona](#)

## Product Information

[Data Sheet Selector](#) > [Data Sheet](#)
☒ ISO ☐ AST

### VECTRA® A950

Base resin having a melt point of 280°C. Suitable for extrusion into film, sheet, and fibers. I recommended for injection molding.

[Best Viewing Tips](#)
[Go To Ticona Global](#)

Property	Method	Value	Ur
<b>Physical Properties</b>			
◆ Density	ISO 1183	1400	kg/
◆ Mold shrinkage - parallel	ISO 294-4	0.0	%
◆ Mold shrinkage - normal	ISO 294-4	0.7	%
◆ Humidity absorption (23°C/50%RH)	ISO 62	0.03	%

### Mechanical Properties

◆ Tensile modulus (1mm/min)	ISO 527-2/1A	10600	M
◆ Tensile stress at break (5mm/min)	ISO 527-2/1A	182	M
◆ Tensile strain at break (5mm/min)	ISO 527-2/1A	3.4	%
◆ Tensile creep modulus 1h	ISO 899-1	9000	M
◆ Tensile creep modulus 1000h	ISO 899-1	6600	M
◆ Flexural modulus (23°C)	ISO 178	9100	M
◆ Flexural strength (23°C)	ISO 178	158	M
◆ Charpy impact strength @ 23C	ISO 179/1eU	267	KJ/
◆ Charpy notched impact strength @ 23°C	ISO 179/1eA	95	KJ/
◆ Unnotched impact str (Izod) @ 23°C	ISO 180/1U	252	KJ/
◆ Notched impact strength (Izod) @ 23°C	ISO 180/1A	95	KJ/

### Thermal Properties

◆ Melting temperature (10 C/min)	ISO 11357-1,-2,-3	280	°
◆ DTUL @ 1.8 MPa	ISO 75-1, -2	187	°
◆ DTUL @ 8.0 MPa	ISO 75-1, -2	94	°
◆ Vicat softening temperature B50 (50C/h 50N)	ISO 306	145	°
◆ Coeff. of linear therm expansion (parallel)	ISO 11359-2	0.04	E-4
◆ Coeff. of linear therm expansion (normal)	ISO 11359-2	0.38	E-4
◆ Flammability at thickness h	UL94	V-0	Cl:

### Electrical Properties

◆ Relative permittivity - 100Hz	IEC 60250	3.2	
---------------------------------	-----------	-----	--

⦿ Relative permittivity - 1MHz	IEC 60250	3.0	
⦿ Dissipation factor - 100Hz	IEC 60250	159	E
⦿ Dissipation factor - 1MHz	IEC 60250	200	E
⦿ Volume resistivity	IEC 60093	1E13	ohr
⦿ Surface resistivity	IEC 60093	1E14	oh
⦿ Electric strength	IEC 60243-1	47	KV,
⦿ Comparative tracking index CTI	IEC 60112	150	

### Test Specimen Production

⦿ Injection molding mold temperature	ISO 294	60-120	°
--------------------------------------	---------	--------	---

### Processing Conditions:

Parameter	Range	Units
Rear temperature	518-536 (270-280)	°F (°C)
Center temperature	536-554 (280-290)	°F (°C)
Front temperature	545-563 (285-295)	°F (°C)
Nozzle temperature	554-572 (290-300)	°F (°C)
Melt temperature	545-563 (285-295)	°F (°C)
Mold temperature	176-248 (80-120)	°F (°C)

### Regrind:

25%

### Additional Grade Information: [expand all](#)

#### Grade Literature List:

View all available literature for the selected grade. [expand to view](#)

#### Product Literature List:

View all available literature for the product. [expand to view](#)

#### Material Safety Data Sheets:

View all available MSDSs for the selected grade. [expand to view](#)

#### Underwriter's Laboratory (UL) Yellow Cards:

View all available UL yellow cards for the selected grade. [expand to view](#)

#### Disclaimer:

NOTICE TO USERS: Values shown are based on testing of laboratory test specimens and represent data that fall standard range of properties for natural material. Colorants or other additives may cause significant variations in data. These values are not intended for use in establishing maximum, minimum, or ranges of values for specification purposes. Determination of the suitability of this material for any use contemplated by the users and the manner of such use is the responsibility of the users, who must assure themselves that the material as subsequently processed meets the requirements of the applicable standards.

particular product or use.

To the best of our knowledge, the information contained in this publication is accurate; however, we do not assume whatsoever for the accuracy and completeness of such information. It is the sole responsibility of the users to investigate whether any existing patents are infringed by the use of the materials mentioned in this publication.

Moreover, there is a need to reduce human exposure to many materials to the lowest practical limits in view of possible adverse effects. To the extent that any hazards may have been mentioned in this publication, we neither suggest nor guarantee that such hazards are the only ones which exist. We recommend that persons intending to rely on such recommendation or use any equipment, processing technique, or material mentioned in this publication should satisfy themselves that they can meet all applicable safety and health standards.

We strongly recommend that users seek and adhere to the manufacturer's or supplier's current instructions for handling material they use. Please consult the nearest Ticona Sales Office, or call the telephone numbers listed above for a technical information. Call Customer Services for the appropriate Materials Safety Data Sheets (MSDS) before attempting to process these products.

Product is not intended for use in medical or dental implants.

»

© 2000 Ticona  
A business of Celanese AG





Data on over 31,000 metals, plastics, ceramics, and composites.

[HELP WANTED!](#) • [HOME](#) • [SEARCH](#) • [TOOLS](#) • [FORUM](#) • [SERVICES](#) • [HEL](#)[Searches:](#) Sequential | Material Type | Property | Composition | Trade Name | Manufacturer

## Solvay Advanced Polymers Xydar® G-930 Liquid Crystal Po

[Printer friendly version](#) [Download to Excel \(requires Excel and Windows\)](#)**Subcategory:** Liquid Crystal Polymer (LCP); Polymer; Thermoplastic**Close Analogs:** This product line was acquired by Solvay Advanced Polymers from BP Amoco in November 200**Key Words:** LCP**Material Notes:**

Data provided by the manufacturer, Amoco Corporation.

This injection-moldable LCP offers the highest heat deflection temperature of any engineering thermoplastics. Din microwave transparency, excellent chemical resistance and is inherently UL94 V-0.

No vendors are listed for this material. Please [click here](#) if you are a supplier and would like information on how to

**Physical Properties**

	Metric	English
Density	<u>1.6 g/cc</u>	0.0578 lb/in <sup>3</sup>
Water Absorption	Max 0.1 %	Max 0.1 %

**Mechanical Properties**

Tensile Strength, Yield	<u>135 MPa</u>	19600 psi
Elongation at Break	1.6 %	1.6 %
Tensile Modulus	<u>18.6 GPa</u>	2700 ksi
Flexural Modulus	<u>13.4 GPa</u>	1940 ksi
Flexural Yield Strength	<u>172 MPa</u>	24900 psi
Izod Impact, Notched	<u>1 J/cm</u>	1.87 ft-lb/in

**Electrical Properties**

Dielectric Constant	4.2	4.2
Dielectric Constant, Low Frequency	4.2	4.2
Dissipation Factor	0.013	0.013

Dissipation Factor, Low Frequency	0.013	0.013
-----------------------------------	-------	-------

**Thermal Properties**

CTE, linear 20°C	<u>12 <math>\mu\text{m/m-}^\circ\text{C}</math></u>	6.67 $\mu\text{in/in-}^\circ\text{F}$	
CTE, linear 20°C Transverse to Flow	<u>20 <math>\mu\text{m/m-}^\circ\text{C}</math></u>	11.1 $\mu\text{in/in-}^\circ\text{F}$	
Maximum Service Temperature, Air	<u>220 <math>^\circ\text{C}</math></u>	428 $^\circ\text{F}$	UL Relative Thermal Index, Electric impact 200°C (400°F); Mechan
Deflection Temperature at 1.8 MPa (264 psi)	<u>271 <math>^\circ\text{C}</math></u>	520 $^\circ\text{F}$	
UL RTI, Electrical	<u>220 <math>^\circ\text{C}</math></u>	428 $^\circ\text{F}$	
UL RTI, Mechanical with Impact	<u>200 <math>^\circ\text{C}</math></u>	392 $^\circ\text{F}$	
UL RTI, Mechanical without Impact	<u>220 <math>^\circ\text{C}</math></u>	428 $^\circ\text{F}$	
Flammability, UL94	V-0	V-0	
Flammability, UL94	V-0	V-0	

Some of the values displayed above may have been converted from their original units and/or rounded in order to display the information in a consistent format. For scientific or engineering calculations you can click on the property value to see the original value as well as raw conversions to equivalent units. We advise you to use one of its raw conversions in your calculations to minimize rounding error. We also ask that you refer to MatWeb's disclaimer and terms of use regarding property values for this datasheet as they were originally entered into MatWeb.

**Subscribe to Premium Services**

**Searches:** Sequential • Composition • Property • Material Type • Manufacturer • Trade Name • UL  
**Other Links:** Advertising • Submit Data • Database Licensing • Web Design & Hosting • Trade Publications  
 Supplier List • Unit Converter • Reference • News • Links • Help • Contact Us • Site Map •

Please read our License Agreement regarding materials data and our Privacy Policy. Questions or comments about MatWeb? Please contact us and we will appreciate your input.

Site designed and maintained by Automation Creations, Inc. The contents of this web site, the MatWeb logo, and "MatWeb" are Copyright 1995-2003 Automation Creations, Inc. MatWeb is intended for personal, non-commercial use. The contents, results, and technical data from this site may not be reproduced either in whole or in part without permission from Automation Creations, Inc.



Data on over 31,000 metals, plastics, ceramics, and composites.

HELP WANTED! • HOME • SEARCH • TOOLS • FORUM • SERVICES • HEL

Searches: Sequential | Material Type | Property | Composition | Trade Name | Manufacturer



## Ticona Vectra® C550 Liquid Crystal Polymer (LCP), 50% Mine

[Printer friendly version](#)
[Download to Excel \(requires Excel and Windows\)](#)
**Subcategory:** Filled/Reinforced Thermoplastic; Liquid Crystal Polymer (LCP); Polymer; Thermoplastic**Key Words:** Hoechst Celanese Corporation**Material Notes:**

Data provided by M. A. Hanna.

No vendors are listed for this material. Please [click here](#) if you are a supplier and would like information on how to**Physical Properties**

	<b>Metric</b>	<b>English</b>
Density	<u>1.89 g/cc</u>	0.0683 lb/in <sup>3</sup>
Water Absorption	0.02 %	0.02 %
Moisture Absorption at Equilibrium	0.02 %	0.02 %
Linear Mold Shrinkage	<u>0.003 cm/cm</u>	0.003 in/in
Linear Mold Shrinkage, Transverse	<u>0.004 cm/cm</u>	0.004 in/in

**Mechanical Properties**

Tensile Strength, Ultimate	<u>115 MPa</u>	16700 psi
Elongation at Break	2.4 %	2.4 %
Tensile Modulus	<u>19 GPa</u>	2760 ksi
Flexural Modulus	<u>17 GPa</u>	2470 ksi
Flexural Yield Strength	<u>170 MPa</u>	24700 psi
Compressive Yield Strength	<u>95 MPa</u>	13800 psi
Charpy Impact, Notched	<u>0.4 J/cm<sup>2</sup></u>	1.9 ft-lb/in <sup>2</sup>
Tensile Impact Strength	<u>50 kJ/m<sup>2</sup></u>	23.8 ft-lb/in <sup>2</sup>
Compressive Modulus	<u>16.5 GPa</u>	2390 ksi
Izod Impact, Notched (ISO)	<u>5 kJ/m<sup>2</sup></u>	2.38 ft-lb/in <sup>2</sup>

**Electrical Properties**

Electrical Resistivity	<u>1e+012 ohm-cm</u>	1e+012 ohm-cm
------------------------	----------------------	---------------

Surface Resistance	1e+016 ohm	1e+016 ohm
Dielectric Constant	3.7	3.7
Dielectric Constant, Low Frequency	4	4
Dissipation Factor	0.007	0.007
Dissipation Factor, Low Frequency	0.02	0.02
Arc Resistance	<u>183 sec</u>	183 sec
Comparative Tracking Index	225 V	225 V

**Thermal Properties**

CTE, linear 20°C	<u>1 µm/m-°C</u>	0.556 µin/in-°F	
CTE, linear 20°C Transverse to Flow	<u>60 µm/m-°C</u>	33.3 µin/in-°F	
CTE, linear 100°C	<u>1 µm/m-°C</u>	0.556 µin/in-°F	Flow
CTE, linear 100°C	<u>60 µm/m-°C</u>	33.3 µin/in-°F	Transverse
Melting Point	<u>325 °C</u>	617 °F	
Maximum Service Temperature, Air	<u>130 °C</u>	266 °F	
Deflection Temperature at 1.8 MPa (264 psi)	<u>225 °C</u>	437 °F	
UL RTI, Electrical	<u>130 °C</u>	266 °F	
UL RTI, Mechanical with Impact	<u>130 °C</u>	266 °F	

Some of the values displayed above may have been converted from their original units and/or rounded in order to display the information in a consistent format. For scientific or engineering calculations you can click on the property value to see the original value as well as raw conversions to equivalent units. We advise you to use one of its raw conversions in your calculations to minimize rounding error. We also ask that you refer to MatWeb's disclaimer and terms of use regarding property values for this datasheet as they were originally entered into MatWeb.

**Subscribe to Premium Services**

**Searches:** Sequential • Composition • Property • Material Type • Manufacturer • Trade Name • UL  
**Other Links:** Advertising • Submit Data • Database Licensing • Web Design & Hosting • Trade Publications  
 Supplier List • Unit Converter • Reference • News • Links • Help • Contact Us • Site Map •

Please read our License Agreement regarding materials data and our Privacy Policy. Questions or comments about MatWeb? Please contact us and we will appreciate your input.

Site designed and maintained by Automation Creations, Inc. The contents of this web site, the MatWeb logo, and "MatWeb" are Copyright 1995-2003 Automation Creations, Inc. MatWeb is intended for personal, non-commercial use. The contents, results, and technical data from this site may not be reproduced either in whole or in part without permission from Automation Creations, Inc.



Data on over 31,000 metals, plastics, ceramics, and composites.

HELP WANTED! • HOME • SEARCH • TOOLS • FORUM • SERVICES • HEL

Searches: Sequential | Material Type | Property | Composition | Trade Name | Manufacturer



## Ticona Vectra® B230 Liquid Crystal Polymer (LCP), 30% Carbon Fil

[Printer friendly version](#)
[Download to Excel \(requires Excel and Windows\)](#)
**Subcategory:** Filled/Reinforced Thermoplastic; Liquid Crystal Polymer (LCP); Polymer; Thermoplastic**Key Words:** Hoechst Celanese Corporation**Material Notes:**

Data provided by M. A. Hanna.

No vendors are listed for this material. Please [click here](#) if you are a supplier and would like information on how to**Physical Properties**

	<b>Metric</b>	<b>English</b>
Density	<u>1.5 g/cc</u>	0.0542 lb/in <sup>3</sup>
Water Absorption	0.03 %	0.03 %
Moisture Absorption at Equilibrium	0.03 %	0.03 %
Linear Mold Shrinkage	<u>0 cm/cm</u>	0 in/in
Linear Mold Shrinkage, Transverse	<u>0 cm/cm</u>	0 in/in

**Mechanical Properties**

Hardness, Rockwell M	99	99
Tensile Strength, Ultimate	<u>190 MPa</u>	27600 psi
Elongation at Break	0.7 %	0.7 %
Tensile Modulus	<u>30 GPa</u>	4350 ksi
Flexural Modulus	<u>25.5 GPa</u>	3700 ksi
Flexural Yield Strength	<u>320 MPa</u>	46400 psi
Compressive Yield Strength	<u>204 MPa</u>	29600 psi
Charpy Impact, Notched	<u>0.9 J/cm<sup>2</sup></u>	4.28 ft-lb/in <sup>2</sup>
Tensile Impact Strength	<u>40 kJ/m<sup>2</sup></u>	19 ft-lb/in <sup>2</sup>
Compressive Modulus	<u>33 GPa</u>	4790 ksi
Izod Impact, Notched (ISO)	<u>9 kJ/m<sup>2</sup></u>	4.28 ft-lb/in <sup>2</sup>

**Electrical Properties**

## Electrical Resistivity

0.1 ohm-cm

0.1 ohm-cm

**Thermal Properties**

CTE, linear 20°C

0  $\mu\text{m}/\text{m}\cdot^\circ\text{C}$ 0  $\mu\text{in}/\text{in}\cdot^\circ\text{F}$ 

CTE, linear 20°C Transverse to Flow

45  $\mu\text{m}/\text{m}\cdot^\circ\text{C}$ 25  $\mu\text{in}/\text{in}\cdot^\circ\text{F}$ 

CTE, linear 100°C

0  $\mu\text{m}/\text{m}\cdot^\circ\text{C}$ 0  $\mu\text{in}/\text{in}\cdot^\circ\text{F}$ 

Flow

CTE, linear 100°C

45  $\mu\text{m}/\text{m}\cdot^\circ\text{C}$ 25  $\mu\text{in}/\text{in}\cdot^\circ\text{F}$ 

Transverse

Melting Point

280 °C

536 °F

Maximum Service Temperature, Air

130 °C

266 °F

Deflection Temperature at 1.8 MPa (264 psi)

235 °C

455 °F

UL RTI, Electrical

130 °C



Data on over 31,000 metals, plastics, ceramics, and composites.

HELP WANTED! • HOME • SEARCH • TOOLS • FORUM • SERVICES • HEL

Searches: Sequential | Material Type | Property | Composition | Trade Name | Manufacturer



## Ticona Vectra® A700 Liquid Crystal Polymer (LCP), 30% Glass I

[Printer friendly version](#)
[Download to Excel \(requires Excel and Windows\)](#)

**Subcategory:** Filled/Reinforced Thermoplastic; Liquid Crystal Polymer (LCP); Polymer; Thermoplastic

**Key Words:** Hoechst Celanese Corporation

**Material Notes:**

Data provided by M. A. Hanna.

No vendors are listed for this material. Please [click here](#) if you are a supplier and would like information on how to

### Physical Properties

	Metric	English
Density	<u>1.63 g/cc</u>	0.0589 lb/in <sup>3</sup>

### Mechanical Properties

Tensile Strength, Ultimate	<u>140 MPa</u>	20300 psi
Elongation at Break	1.5 %	1.5 %
Tensile Modulus	<u>14 GPa</u>	2030 ksi
Flexural Modulus	<u>14.4 GPa</u>	2090 ksi
Flexural Yield Strength	<u>230 MPa</u>	33400 psi
Compressive Yield Strength	<u>100 MPa</u>	14500 psi
Charpy Impact, Notched	<u>1.5 J/cm<sup>2</sup></u>	7.14 ft-lb/in <sup>2</sup>
Compressive Modulus	<u>14.5 GPa</u>	2100 ksi
Izod Impact, Notched (ISO)	<u>12 kJ/m<sup>2</sup></u>	5.71 ft-lb/in <sup>2</sup>

### Electrical Properties

Electrical Resistivity	<u>10000 ohm-cm</u>	10000 ohm-cm
Surface Resistance	1e+010 ohm	1e+010 ohm
Comparative Tracking Index	175 V	175 V

### Thermal Properties

CTE, linear 20°C	<u>9 <math>\mu\text{m}/\text{m}\cdot^\circ\text{C}</math></u>	5 $\mu\text{in}/\text{in}\cdot^\circ\text{F}$	
CTE, linear 20°C Transverse to Flow	<u>60 <math>\mu\text{m}/\text{m}\cdot^\circ\text{C}</math></u>	33.3 $\mu\text{in}/\text{in}\cdot^\circ\text{F}$	
CTE, linear 100°C	<u>60 <math>\mu\text{m}/\text{m}\cdot^\circ\text{C}</math></u>	33.3 $\mu\text{in}/\text{in}\cdot^\circ\text{F}$	Transverse
CTE, linear 100°C	<u>9 <math>\mu\text{m}/\text{m}\cdot^\circ\text{C}</math></u>	5 $\mu\text{in}/\text{in}\cdot^\circ\text{F}$	Flow
Melting Point	<u>280 °C</u>	536 °F	
Maximum Service Temperature, Air	<u>130 °C</u>	266 °F	
Deflection Temperature at 1.8 MPa (264 psi)	<u>225 °C</u>	437 °F	
UL RTI, Electrical	<u>130 °C</u>	266 °F	
UL RTI, Mechanical with Impact	<u>130 °C</u>	266 °F	
Flammability, UL94	V-0	V-0	

Some of the values displayed above may have been converted from their original units and/or rounded in order to display the information in a consistent format. For scientific or engineering calculations you can click on the property value to see the original value as well as raw conversions to equivalent units. We advise you to use one of its raw conversions in your calculations to minimize rounding error. We also ask that you refer to MatWeb's disclaimer and terms of use regarding property values for this datasheet as they were originally entered into MatWeb.



#### Subscribe to Premium Services

**Searches:** Sequential • Composition • Property • Material Type • Manufacturer • Trade Name • UT  
**Other Links:** Advertising • Submit Data • Database Licensing • Web Design & Hosting • Trade Publications • Supplier List • Unit Converter • Reference • News • Links • Help • Contact Us • Site Map •

Please read our License Agreement regarding materials data and our Privacy Policy. Questions or comments about MatWeb? Please contact us and we will appreciate your input.

Site designed and maintained by Automation Creations, Inc. The contents of this web site, the MatWeb logo, and "MatWeb" are Copyright 1998 Automation Creations, Inc. MatWeb is intended for personal, non-commercial use. The contents, results, and technical data from this site may not be reproduced either in whole or in part without permission from Automation Creations, Inc.





MATERIAL PROPERTY DATA

Data on over 31,000 metals, plastics, ceramics, and composites.

HELP WANTED! • HOME • SEARCH • TOOLS • FORUM • SERVICES • HEL

Searches: Sequential | Material Type | Property | Composition | Trade Name | Manufacturer



## Ticona Vectra® A625 Liquid Crystal Polymer (LCP), 25% Grap

[Printer friendly version](#)
[Download to Excel \(requires Excel and Windows\)](#)

**Subcategory:** Filled/Reinforced Thermoplastic; Liquid Crystal Polymer (LCP); Polymer; Thermoplastic

**Key Words:** Hoechst Celanese Corporation

**Material Notes:**

Data provided by M. A. Hanna.

No vendors are listed for this material. Please [click here](#) if you are a supplier and would like information on how to

### Physical Properties

	Metric	English
Density	<u>1.54 g/cc</u>	0.0556 lb/in <sup>3</sup>
Water Absorption	0.03 %	0.03 %
Moisture Absorption at Equilibrium	0.03 %	0.03 %
Linear Mold Shrinkage	<u>0.001 cm/cm</u>	0.001 in/in
Linear Mold Shrinkage, Transverse	<u>0.003 cm/cm</u>	0.003 in/in

### Mechanical Properties

Hardness, Rockwell M	62	62
Tensile Strength, Ultimate	<u>140 MPa</u>	20300 psi
Elongation at Break	5.7 %	5.7 %
Tensile Modulus	<u>10 GPa</u>	1450 ksi
Flexural Modulus	<u>10 GPa</u>	1450 ksi
Flexural Yield Strength	<u>140 MPa</u>	20300 psi
Compressive Yield Strength	<u>56 MPa</u>	8120 psi
Charpy Impact, Notched	<u>1.5 J/cm<sup>2</sup></u>	7.14 ft-lb/in <sup>2</sup>
Tensile Impact Strength	<u>80 kJ/m<sup>2</sup></u>	38.1 ft-lb/in <sup>2</sup>
Compressive Modulus	<u>9 GPa</u>	1310 ksi
Coefficient of Friction	0.15	0.15
Izod Impact, Notched (ISO)	<u>22 kJ/m<sup>2</sup></u>	10.5 ft-lb/in <sup>2</sup>

**Electrical Properties**

Electrical Resistivity	<u>1e+012 ohm-cm</u>	1e+012 ohm-cm
Surface Resistance	1e+015 ohm	1e+015 ohm
Dielectric Constant	10	10
Dielectric Constant, Low Frequency	25	25
Dissipation Factor	0.14	0.14
Dissipation Factor, Low Frequency	0.17	0.17
Comparative Tracking Index	200 V	200 V

**Thermal Properties**

CTE, linear 20°C	<u>10 µm/m-°C</u>	5.56 µin/in-°F	
CTE, linear 20°C Transverse to Flow	<u>50 µm/m-°C</u>	27.8 µin/in-°F	
CTE, linear 100°C	<u>10 µm/m-°C</u>	5.56 µin/in-°F	Flow
CTE, linear 100°C	<u>50 µm/m-°C</u>	27.8 µin/in-°F	Transverse
Melting Point	<u>280 °C</u>	536 °F	
Maximum Service Temperature, Air	<u>130 °C</u>	266 °F	
Deflection Temperature at 1.8 MPa (264 psi)	<u>185 °C</u>	365 °F	
Vicat Softening Point	<u>227 °C</u>	441 °F	
UL RTI, Electrical	<u>130 °C</u>	266 °F	
UL RTI, Mechanical with Impact	<u>130 °C</u>	266 °F	
Flammability, UL94	V-0	V-0	

Some of the values displayed above may have been converted from their original units and/or rounded in order to display the information in a consistent format. For scientific or engineering calculations, you can click on the property value to see the original value as well as raw conversions to equivalent units. We advise you to use one of its raw conversions in your calculations to minimize rounding error. We also ask that you refer to MatWeb's disclaimer and terms of use regarding property values for this datasheet as they were originally entered into MatWeb.

**Subscribe to Premium Services**

**Searches:** Sequential • Composition • Property • Material Type • Manufacturer • Trade Name • Unit Conversion •  
**Other Links:** Advertising • Submit Data • Database Licensing • Web Design & Hosting • Trade Publication •  
 Supplier List • Unit Converter • Reference • News • Links • Help • Contact Us • Site Map •

Please read our License Agreement regarding materials data and our Privacy Policy. Questions or comments about MatWeb? Please contact us and we will appreciate your input.

Site designed and maintained by Automation Creations, Inc. The contents of this web site, the MatWeb logo, and "MatWeb" are Copyright 1995-2003 Automation Creations, Inc. MatWeb is intended for personal, non-commercial use. The contents, results, and technical data from this site may not be reproduced either in whole or in part without permission from Automation Creations, Inc.



Data on over 31,000 metals, plastics, ceramics, and composites.

HELP WANTED! • HOME • SEARCH • TOOLS • FORUM • SERVICES • HEL

Searches: Sequential | Material Type | Property | Composition | Trade Name | Manufacturer



## Ticona Vectra® A540 Liquid Crystal Polymer (LCP), 40% Mine

[Printer friendly version](#)
[Download to Excel \(requires Excel and Windows\)](#)
**Subcategory:** Filled/Reinforced Thermoplastic; Liquid Crystal Polymer (LCP); Polymer; Thermoplastic**Key Words:** Hoechst Celanese Corporation**Material Notes:**

Data provided by M. A. Hanna.

No vendors are listed for this material. Please [click here](#) if you are a supplier and would like information on how to**Physical Properties**

	<b>Metric</b>	<b>English</b>
Density	<u>1.76 g/cc</u>	0.0636 lb/in <sup>3</sup>
Water Absorption	0.02 %	0.02 %
Moisture Absorption at Equilibrium	0.02 %	0.02 %
Linear Mold Shrinkage	<u>0.002 cm/cm</u>	0.002 in/in
Linear Mold Shrinkage, Transverse	<u>0.004 cm/cm</u>	0.004 in/in

**Mechanical Properties**

Hardness, Rockwell M	63	63
Tensile Strength, Ultimate	<u>155 MPa</u>	22500 psi
Elongation at Break	3.9 %	3.9 %
Tensile Modulus	<u>19 GPa</u>	2760 ksi
Flexural Modulus	<u>16 GPa</u>	2320 ksi
Flexural Yield Strength	<u>195 MPa</u>	28300 psi
Compressive Yield Strength	<u>78 MPa</u>	11300 psi
Charpy Impact, Notched	<u>4 J/cm<sup>2</sup></u>	19 ft-lb/in <sup>2</sup>
Tensile Impact Strength	<u>40 kJ/m<sup>2</sup></u>	19 ft-lb/in <sup>2</sup>
Compressive Modulus	<u>12 GPa</u>	1740 ksi
Coefficient of Friction	0.12	0.12
Izod Impact, Notched (ISO)	<u>20 kJ/m<sup>2</sup></u>	9.52 ft-lb/in <sup>2</sup>

**Electrical Properties**

Electrical Resistivity	<u>1e+012 ohm-cm</u>	1e+012 ohm-cm
Surface Resistance	1e+016 ohm	1e+016 ohm
Dielectric Constant	3.7	3.7
Dielectric Constant, Low Frequency	4.2	4.2
Dissipation Factor	0.008	0.008
Dissipation Factor, Low Frequency	0.02	0.02
Arc Resistance	<u>180 sec</u>	180 sec
Comparative Tracking Index	200 V	200 V

**Thermal Properties**

CTE, linear 20°C	<u>0 µm/m-°C</u>	0 µin/in-°F	
CTE, linear 20°C Transverse to Flow	<u>50 µm/m-°C</u>	27.8 µin/in-°F	
CTE, linear 100°C	<u>0 µm/m-°C</u>	0 µin/in-°F	Flow
CTE, linear 100°C	<u>50 µm/m-°C</u>	27.8 µin/in-°F	Transverse
Melting Point	<u>280 °C</u>	536 °F	
Maximum Service Temperature, Air	<u>130 °C</u>	266 °F	
Deflection Temperature at 1.8 MPa (264 psi)	<u>200 °C</u>	392 °F	
UL RTI, Electrical	<u>130 °C</u>	266 °F	
UL RTI, Mechanical with Impact	<u>130 °C</u>	266 °F	
Flammability, UL94	V-0	V-0	

Some of the values displayed above may have been converted from their original units and/or rounded in order to display the information in a consistent manner. For scientific or engineering calculations you can click on the property value to see the original value as well as raw conversions to equivalent units. We advise you to use one of its raw conversions in your calculations to minimize rounding error. We also ask that you refer to MatWeb's disclaimer and terms of use regarding property values for this datasheet as they were originally entered into MatWeb.

**Subscribe to Premium Services**

**Searches:** Sequential • Composition • Property • Material Type • Manufacturer • Trade Name • Unit  
**Other Links:** Advertising • Submit Data • Database Licensing • Web Design & Hosting • Trade Publication  
 Supplier List • Unit Converter • Reference • News • Links • Help • Contact Us • Site Map •

Please read our License Agreement regarding materials data and our Privacy Policy. Questions or comments about MatWeb? Please contact us and we will appreciate your input.

Site designed and maintained by Automation Creations, Inc. The contents of this web site, the MatWeb logo, and "MatWeb" are Copyright 1995-2003 Inc. MatWeb is intended for personal, non-commercial use. The contents, results, and technical data from this site may not be reproduced either in whole or in part without permission from Automation Creations, Inc.



Data on over 31,000 metals, plastics, ceramics, and composites.

HELP WANTED! • HOME • SEARCH • TOOLS • FORUM • SERVICES • HEL

Searches: Sequential | Material Type | Property | Composition | Trade Name | Manufacturer



## Ticona Vectra® A530 Liquid Crystal Polymer (LCP), 30% Mine

[Printer friendly version](#)
[Download to Excel \(requires Excel and Windows\)](#)
**Subcategory:** Filled/Reinforced Thermoplastic; Liquid Crystal Polymer (LCP); Polymer; Thermoplastic**Key Words:** Hoechst Celanese Corporation**Material Notes:**

Data provided by M. A. Hanna.

No vendors are listed for this material. Please [click here](#) if you are a supplier and would like information on how to**Physical Properties**

	<b>Metric</b>	<b>English</b>
Density	<u>1.65 g/cc</u>	0.0596 lb/in <sup>3</sup>
Water Absorption	0.02 %	0.02 %
Moisture Absorption at Equilibrium	0.02 %	0.02 %
Linear Mold Shrinkage	<u>0.002 cm/cm</u>	0.002 in/in
Linear Mold Shrinkage, Transverse	<u>0.004 cm/cm</u>	0.004 in/in

**Mechanical Properties**

Tensile Strength, Ultimate	<u>175 MPa</u>	25400 psi
Elongation at Break	5.5 %	5.5 %
Tensile Modulus	<u>14 GPa</u>	2030 ksi
Flexural Modulus	<u>11 GPa</u>	1600 ksi
Flexural Yield Strength	<u>175 MPa</u>	25400 psi
Compressive Yield Strength	<u>60 MPa</u>	8700 psi
Charpy Impact, Notched	<u>0.4 J/cm<sup>2</sup></u>	1.9 ft-lb/in <sup>2</sup>
Compressive Modulus	<u>10 GPa</u>	1450 ksi
Izod Impact, Notched (ISO)	<u>45 kJ/m<sup>2</sup></u>	21.4 ft-lb/in <sup>2</sup>

**Electrical Properties**

Electrical Resistivity	<u>1e+012 ohm-cm</u>	1e+012 ohm-cm
Surface Resistance	1e+017 ohm	1e+017 ohm

Dielectric Constant	3.3	3.3
Dielectric Constant, Low Frequency	3.7	3.7
Dissipation Factor	0.008	0.008
Dissipation Factor, Low Frequency	0.02	0.02
Arc Resistance	<u>180 sec</u>	180 sec
Comparative Tracking Index	200 V	200 V

**Thermal Properties**

CTE, linear 20°C	<u>12 µm/m-°C</u>	6.67 µin/in-°F	
CTE, linear 20°C Transverse to Flow	<u>69 µm/m-°C</u>	38.3 µin/in-°F	
CTE, linear 100°C	<u>12 µm/m-°C</u>	6.67 µin/in-°F	Flow
CTE, linear 100°C	<u>69 µm/m-°C</u>	38.3 µin/in-°F	Transverse
Melting Point	<u>280 °C</u>	536 °F	
Maximum Service Temperature, Air	<u>130 °C</u>	266 °F	
Deflection Temperature at 1.8 MPa (264 psi)	<u>185 °C</u>	365 °F	
UL RTI, Electrical	<u>130 °C</u>	266 °F	
UL RTI, Mechanical with Impact	<u>130 °C</u>	266 °F	
Flammability, UL94	V-0	V-0	

Some of the values displayed above may have been converted from their original units and/or rounded in order to display the information in a consistent format. For scientific or engineering calculations you can click on the property value to see the original value as well as raw conversions to equivalent units. We advise you to use one of its raw conversions in your calculations to minimize rounding error. We also ask that you refer to MatWeb's disclaimer and terms of use regarding property values for this datasheet as they were originally entered into MatWeb.

**Subscribe to Premium Services**

**Searches:** Sequential • Composition • Property • Material Type • Manufacturer • Trade Name • Unit Converter  
**Other Links:** Advertising • Submit Data • Database Licensing • Web Design & Hosting • Trade Publications • Supplier List • Unit Converter • Reference • News • Links • Help • Contact Us • Site Map •

Please read our License Agreement regarding materials data and our Privacy Policy. Questions or comments about MatWeb? Please contact us and we will appreciate your input.

Site designed and maintained by Automation Creations, Inc. The contents of this web site, the MatWeb logo, and "MatWeb" are Copyright 1998-2003 Automation Creations, Inc. MatWeb is intended for personal, non-commercial use. The contents, results, and technical data from this site may not be reproduced either in whole or in part without permission from Automation Creations, Inc.



Data on over 31,000 metals, plastics, ceramics, and composites.

HELP WANTED! • HOME • SEARCH • TOOLS • FORUM • SERVICES • HEL

Searches: Sequential | Material Type | Property | Composition | Trade Name | Manufacturer



## Ticona Vectra® A515 Liquid Crystal Polymer (LCP), 15% Mine

[Printer friendly version](#)
[Download to Excel \(requires Excel and Windows\)](#)

**Subcategory:** Filled/Reinforced Thermoplastic; Liquid Crystal Polymer (LCP); Polymer; Thermoplastic

**Key Words:** Hoechst Celanese Corporation

**Material Notes:**

Data provided by M. A. Hanna.

No vendors are listed for this material. Please [click here](#) if you are a supplier and would like information on how to

### Physical Properties

	Metric	English
Density	<u>1.52 g/cc</u>	0.0549 lb/in <sup>3</sup>
Water Absorption	0.02 %	0.02 %
Moisture Absorption at Equilibrium	0.02 %	0.02 %
Linear Mold Shrinkage	<u>0.003 cm/cm</u>	0.003 in/in
Linear Mold Shrinkage, Transverse	<u>0.004 cm/cm</u>	0.004 in/in

### Mechanical Properties

Hardness, Rockwell M	63	63
Tensile Strength, Ultimate	<u>175 MPa</u>	25400 psi
Elongation at Break	4.6 %	4.6 %
Tensile Modulus	<u>14 GPa</u>	2030 ksi
Flexural Modulus	<u>11 GPa</u>	1600 ksi
Flexural Yield Strength	<u>170 MPa</u>	24700 psi
Compressive Yield Strength	<u>61 MPa</u>	8850 psi
Charpy Impact, Notched	<u>2.1 J/cm<sup>2</sup></u>	9.99 ft-lb/in <sup>2</sup>
Tensile Impact Strength	<u>80 kJ/m<sup>2</sup></u>	38.1 ft-lb/in <sup>2</sup>
Compressive Modulus	<u>10 GPa</u>	1450 ksi
Coefficient of Friction	0.19	0.19
Izod Impact, Notched (ISO)	<u>60 kJ/m<sup>2</sup></u>	28.6 ft-lb/in <sup>2</sup>

**Electrical Properties**

Electrical Resistivity	<u>1e+012 ohm-cm</u>	1e+012 ohm-cm
Surface Resistance	<u>1e+017 ohm</u>	1e+017 ohm
Dielectric Constant	3.1	3.1
Dielectric Constant, Low Frequency	3.6	3.6
Dissipation Factor	0.009	0.009
Dissipation Factor, Low Frequency	0.03	0.03
Arc Resistance	<u>145 sec</u>	145 sec
Comparative Tracking Index	175 V	175 V

**Thermal Properties**

CTE, linear 20°C	<u>-10 µm/m-°C</u>	-5.56 µin/in-°F	
CTE, linear 20°C Transverse to Flow	<u>64 µm/m-°C</u>	35.6 µin/in-°F	
CTE, linear 100°C	<u>-10 µm/m-°C</u>	-5.56 µin/in-°F	Flow
CTE, linear 100°C	<u>64 µm/m-°C</u>	35.6 µin/in-°F	Transverse
Melting Point	<u>280 °C</u>	536 °F	
Maximum Service Temperature, Air	<u>130 °C</u>	266 °F	
Deflection Temperature at 1.8 MPa (264 psi)	<u>185 °C</u>	365 °F	
UL RTI, Electrical	<u>130 °C</u>	266 °F	
UL RTI, Mechanical with Impact	<u>130 °C</u>	266 °F	
Flammability, UL94	V-0	V-0	

Some of the values displayed above may have been converted from their original units and/or rounded in order to display the information in a consistent manner. For scientific or engineering calculations you can click on the property value to see the original value as well as raw conversions to equivalent units. We advise you to use one of its raw conversions in your calculations to minimize rounding error. We also ask that you refer to MatWeb's disclaimer and terms of use regarding property values for this datasheet as they were originally entered into MatWeb.

**Subscribe to Premium Services**

**Searches:** Sequential • Composition • Property • Material Type • Manufacturer • Trade Name • Unit Converter  
**Other Links:** Advertising • Submit Data • Database Licensing • Web Design & Hosting • Trade Publication • Supplier List • Unit Converter • Reference • News • Links • Help • Contact Us • Site Map •

Please read our License Agreement regarding materials data and our Privacy Policy. Questions or comments about MatWeb? Please contact us and we will appreciate your input.

Site designed and maintained by Automation Creations, Inc. The contents of this web site, the MatWeb logo, and "MatWeb" are Copyright 1995-2003 Automation Creations, Inc. MatWeb is intended for personal, non-commercial use. The contents, results, and technical data from this site may not be reproduced either in whole or in part without permission from Automation Creations, Inc.





Data on over 31,000 metals, plastics, ceramics, and composites.

HELP WANTED! • HOME • SEARCH • TOOLS • FORUM • SERVICES • HEL

Searches: Sequential | Material Type | Property | Composition | Trade Name | Manufacturer



## Vectran HS LCP Fiber

[Printer friendly version](#)
[Download to Excel \(requires Excel and Windows\)](#)

**Subcategory:** Composite Fibers; Liquid Crystal Polymer (LCP); Polymer; Thermoplastic

### Material Notes:

**Description:** Vectran is a high-performance thermoplastic multifilament yarn spun from Vectran ® liquid crystal polymer. It is the most commercially available melt spun LCP fiber in the world. Vectran fiber exhibits exceptional strength and rigidity. It is five times stronger than steel and ten times stronger than aluminum. These properties characterize Vectran: High creep resistance, high abrasion resistance, excellent flex/fold characteristics, minimal moisture absorption, excellent coefficient of thermal expansion (CTE), high dielectric strength, outstanding cut resistance, excellent property retention, outstanding vibration damping characteristics, high impact resistance.

**Applications:** Ropes and cables, electronics, recreations, aerospace, composites, military, industrial

**Chemical Resistance:** Hydrolytically stable. Resistant to organic solvents. Stable to acids (<90% conc.). Stable to

Data provided by Celanese Acetate LLC.

No vendors are listed for this material. Please [click here](#) if you are a supplier and would like information on how to

### Physical Properties

	Metric	English
Density	1.4 g/cc	0.0506 lb/in <sup>3</sup>
Moisture Absorption at Equilibrium	Max 0.1 %	Max 0.1 %

### Mechanical Properties

Tensile Strength, Ultimate	2840 - 3210 MPa	412000 - 465000 psi	10 in. gauge length, 10% str
Elongation at Break	3.3 - 3.7 %	3.3 - 3.7 %	10 in. gauge length, 10% str
Tensile Modulus	64.8 - 72.4 GPa	9400 - 10500 ksi	10 in. gauge length, 10% str

### Electrical Properties

Dielectric Constant	3.3	3.3	at
---------------------	-----	-----	----

### Thermal Properties

Melting Point	330 °C	626 °F
---------------	--------	--------

Some of the values displayed above may have been converted from their original units and/or rounded in order to display the information in a consistent format. For scientific or engineering calculations, you can click on the property value to see the original value as well as raw conversions to equivalent units. We advise you to use one of its raw conversions in your calculations to minimize rounding error. We also ask that you refer to MatWeb's disclaimer and terms of use regarding property values for this datasheet as they were originally entered into MatWeb.



**Subscribe to Premium Services**

**Searches:** Sequential • Composition • Property • Material Type • Manufacturer • Trade Name • Unit Converter  
**Other Links:** Advertising • Submit Data • Database Licensing • Web Design & Hosting • Trade Publications • Supplier List • Unit Converter • Reference • News • Links • Help • Contact Us • Site Map •

Please read our License Agreement regarding materials data and our Privacy Policy. Questions or comments about MatWeb? Please contact us and we will appreciate your input.

Site designed and maintained by Automation Creations, Inc. The contents of this web site, the MatWeb logo, and "MatWeb" are Copyright 1998-2003 Automation Creations, Inc. MatWeb is intended for personal, non-commercial use. The contents, results, and technical data from this site may not be reproduced either in whole or in part without permission from Automation Creations, Inc.



MATERIAL PROPERTY DATA

Data on over 31,000 metals, plastics, ceramics, and composites.

HELP WANTED! • HOME • SEARCH • TOOLS • FORUM • SERVICES • HEL

Searches: Sequential | Material Type | Property | Composition | Trade Name | Manufacturer

MatWeb  
presentsMatWeb  
MATERIAL PROPERTY DATA

## Vectran M LCP Fiber

[Printer friendly version](#)
[Download to Excel \(requires Excel and Windows\)](#)
**Subcategory:** Composite Fibers; Liquid Crystal Polymer (LCP); Polymer; Thermoplastic**Material Notes:**

**Description:** Vectran is a high-performance thermoplastic multifilament yarn spun from Vectran® liquid crystal polymer. It is the most commercially available melt spun LCP fiber in the world. Vectran fiber exhibits exceptional strength and rigidity. It is five times stronger than steel and ten times stronger than aluminum. These properties characterize Vectran: High creep resistance, high abrasion resistance, excellent flex/fold characteristics, minimal moisture absorption, excellent coefficient of thermal expansion (CTE), high dielectric strength, outstanding cut resistance, excellent property retention, outstanding vibration damping characteristics, high impact resistance.

**Applications:** Ropes and cables, electronics, recreations, aerospace, composites, military, industrial**Chemical Resistance:** Hydrolytically stable. Resistant to organic solvents. Stable to acids (<90% conc.). Stable to alkalis.

Data provided by Celanese Acetate LLC.

No vendors are listed for this material. Please [click here](#) if you are a supplier and would like information on how to list your company.**Physical Properties**

	Metric	English
Density	1.4 g/cc	0.0506 lb/in <sup>3</sup>
Moisture Absorption at Equilibrium	Max 0.1 %	Max 0.1 %

**Mechanical Properties**

Tensile Strength, Ultimate	1110 MPa	161000 psi	10 in. gauge length, 10% strain
Elongation at Break	2 %	2 %	10 in. gauge length, 10% strain
Tensile Modulus	52.4 GPa	7600 ksi	10 in. gauge length, 10% strain

**Electrical Properties**

Dielectric Constant	3.3	3.3	at 100 Hz
---------------------	-----	-----	-----------

**Thermal Properties**

Melting Point	276 °C	529 °F
---------------	--------	--------

Some of the values displayed above may have been converted from their original units and/or rounded in order to display the information in a consistent format. For scientific or engineering calculations, you can click on the property value to see the original value as well as raw conversions to equivalent units. We advise you to use one of its raw conversions in your calculations to minimize rounding error. We also ask that you refer to MatWeb's disclaimer and terms of use regarding property values for this datasheet as they were originally entered into MatWeb.



**Subscribe to Premium Services**

**Searches:** Sequential • Composition • Property • Material Type • Manufacturer • Trade Name • Unit Converter  
**Other Links:** Advertising • Submit Data • Database Licensing • Web Design & Hosting • Trade Publications • Supplier List • Unit Converter • Reference • News • Links • Help • Contact Us • Site Map •

Please read our License Agreement regarding materials data and our Privacy Policy. Questions or comments about MatWeb? Please contact us and we will appreciate your input.

Site designed and maintained by Automation Creations, Inc. The contents of this web site, the MatWeb logo, and "MatWeb" are Copyright 1998 Automation Creations, Inc. MatWeb is intended for personal, non-commercial use. The contents, results, and technical data from this site may not be reproduced either in whole or in part without permission from Automation Creations, Inc.



Data on over 31,000 metals, plastics, ceramics, and composites.

HELP WANTED! • HOME • SEARCH • TOOLS • FORUM • SERVICES • HEL

Searches: Sequential | Material Type | Property | Composition | Trade Name | Manufacturer



## Ticona Vectra® A440 Liquid Crystal Polymer (LCP), Glass/PTI

Printer friendly version

Download to Excel (requires Excel and Windows)

**Subcategory:** Filled/Reinforced Thermoplastic; Liquid Crystal Polymer (LCP); Polymer; Thermoplastic

**Key Words:** Hoechst Celanese Corporation

### Material Notes:

Data provided by M. A. Hanna.

No vendors are listed for this material. Please [click here](#) if you are a supplier and would like information on how to

### Physical Properties

	Metric	English
Density	<u>1.65 g/cc</u>	0.0596 lb/in <sup>3</sup>

### Mechanical Properties

Tensile Strength, Ultimate	<u>180 MPa</u>	26100 psi
Elongation at Break	2.6 %	2.6 %
Tensile Modulus	<u>16 GPa</u>	2320 ksi
Flexural Modulus	<u>15 GPa</u>	2180 ksi
Flexural Yield Strength	<u>245 MPa</u>	35500 psi
Compressive Yield Strength	<u>110 MPa</u>	16000 psi
Charpy Impact, Notched	<u>3.7 J/cm<sup>2</sup></u>	17.6 ft-lb/in <sup>2</sup>
Compressive Modulus	<u>15 GPa</u>	2180 ksi
Izod Impact, Notched (ISO)	<u>22 kJ/m<sup>2</sup></u>	10.5 ft-lb/in <sup>2</sup>

### Electrical Properties

Electrical Resistivity	<u>1e+012 ohm-cm</u>	1e+012 ohm-cm
Surface Resistance	1e+016 ohm	1e+016 ohm
Dielectric Constant	3.4	3.4
Dielectric Constant, Low Frequency	3.7	3.7
Dissipation Factor	0.008	0.008
Dissipation Factor, Low Frequency	0.02	0.02

Arc Resistance	<u>180 sec</u>	180 sec
Comparative Tracking Index	175 V	175 V

**Thermal Properties**

Melting Point	<u>280 °C</u>	536 °F
Maximum Service Temperature, Air	<u>130 °C</u>	266 °F
Deflection Temperature at 1.8 MPa (264 psi)	<u>230 °C</u>	446 °F
UL RTI, Electrical	<u>130 °C</u>	266 °F
UL RTI, Mechanical with Impact	<u>130 °C</u>	266 °F
Flammability, UL94	V-0	V-0

Some of the values displayed above may have been converted from their original units and/or rounded in order to display the information in a consistent manner. For scientific or engineering calculations you can click on the property value to see the original value as well as raw conversions to equivalent units. We advise you to use one of its raw conversions in your calculations to minimize rounding error. We also ask that you refer to MatWeb's disclaimer and terms of use regarding property values for this datasheet as they were originally entered into MatWeb.

**Subscribe to Premium Services**

**Searches:** Sequential • Composition • Property • Material Type • Manufacturer • Trade Name • Unit Converter  
**Other Links:** Advertising • Submit Data • Database Licensing • Web Design & Hosting • Trade Publication  
Supplier List • Unit Converter • Reference • News • Links • Help • Contact Us • Site Map •

Please read our License Agreement regarding materials data and our Privacy Policy. Questions or comments about MatWeb? Please contact us and we will appreciate your input.

Site designed and maintained by Automation Creations, Inc. The contents of this web site, the MatWeb logo, and "MatWeb" are Copyright 1996 by Automation Creations, Inc. MatWeb is intended for personal, non-commercial use. The contents, results, and technical data from this site may not be reproduced either in whole or in part without permission from Automation Creations, Inc.



Data on over 31,000 metals, plastics, ceramics, and composites.

HELP WANTED! • HOME • SEARCH • TOOLS • FORUM • SERVICES • HEL

Searches: Sequential | Material Type | Property | Composition | Trade Name | Manufacturer



## Ticona Vectra® A435 Liquid Crystal Polymer (LCP), Glass/PTI

[Printer friendly version](#)
[Download to Excel \(requires Excel and Windows\)](#)

**Subcategory:** Filled/Reinforced Thermoplastic; Liquid Crystal Polymer (LCP); Polymer; Thermoplastic

**Key Words:** Hoechst Celanese Corporation

**Material Notes:**

Data provided by M. A. Hanna.

No vendors are listed for this material. Please [click here](#) if you are a supplier and would like information on how to

### Physical Properties

	Metric	English
Density	<u>1.62 g/cc</u>	0.0585 lb/in <sup>3</sup>

### Mechanical Properties

Tensile Strength, Ultimate	<u>175 MPa</u>	25400 psi
Elongation at Break	3.3 %	3.3 %
Tensile Modulus	<u>12 GPa</u>	1740 ksi
Flexural Modulus	<u>10 GPa</u>	1450 ksi
Flexural Yield Strength	<u>210 MPa</u>	30500 psi
Compressive Yield Strength	<u>77 MPa</u>	11200 psi
Charpy Impact, Notched	<u>4 J/cm<sup>2</sup></u>	19 ft-lb/in <sup>2</sup>
Compressive Modulus	<u>10.5 GPa</u>	1520 ksi
Coefficient of Friction	0.11	0.11
Izod Impact, Notched (ISO)	<u>30 kJ/m<sup>2</sup></u>	14.3 ft-lb/in <sup>2</sup>

### Electrical Properties

Electrical Resistivity	<u>1e+012 ohm-cm</u>	1e+012 ohm-cm
Surface Resistance	1e+016 ohm	1e+016 ohm
Dielectric Constant	2.8	2.8
Dielectric Constant, Low Frequency	3.2	3.2
Dissipation Factor	0.007	0.007

Dissipation Factor, Low Frequency	0.02	0.02
Comparative Tracking Index	175 V	175 V

**Thermal Properties**

CTE, linear 20°C	<u>0 <math>\mu\text{m}/\text{m}\cdot^\circ\text{C}</math></u>	0 $\mu\text{in}/\text{in}\cdot^\circ\text{F}$	
CTE, linear 20°C Transverse to Flow	<u>85 <math>\mu\text{m}/\text{m}\cdot^\circ\text{C}</math></u>	47.2 $\mu\text{in}/\text{in}\cdot^\circ\text{F}$	
CTE, linear 100°C	<u>0 <math>\mu\text{m}/\text{m}\cdot^\circ\text{C}</math></u>	0 $\mu\text{in}/\text{in}\cdot^\circ\text{F}$	Flow
CTE, linear 100°C	<u>85 <math>\mu\text{m}/\text{m}\cdot^\circ\text{C}</math></u>	47.2 $\mu\text{in}/\text{in}\cdot^\circ\text{F}$	Transverse
Melting Point	<u>280 °C</u>	536 °F	
Maximum Service Temperature, Air	<u>130 °C</u>	266 °F	
Deflection Temperature at 1.8 MPa (264 psi)	<u>230 °C</u>	446 °F	
UL RTI, Electrical	<u>130 °C</u>	266 °F	
UL RTI, Mechanical with Impact	<u>130 °C</u>	266 °F	
Flammability, UL94	V-0	V-0	

Some of the values displayed above may have been converted from their original units and/or rounded in order to display the information in a consistent manner. For scientific or engineering calculations, you can click on the property value to see the original value as well as raw conversions to equivalent units. We advise you to use one of its raw conversions in your calculations to minimize rounding error. We also ask that you refer to MatWeb's disclaimer and terms of use regarding property values for this datasheet as they were originally entered into MatWeb.

**Subscribe to Premium Services**

**Searches:** Sequential • Composition • Property • Material Type • Manufacturer • Trade Name • Unit Converter  
**Other Links:** Advertising • Submit Data • Database Licensing • Web Design & Hosting • Trade Publications • Supplier List • Unit Converter • Reference • News • Links • Help • Contact Us • Site Map •

Please read our License Agreement regarding materials data and our Privacy Policy. Questions or comments about MatWeb? Please contact us and we will appreciate your input.

Site designed and maintained by Automation Creations, Inc. The contents of this web site, the MatWeb logo, and "MatWeb" are Copyright 1995-2003 by Automation Creations, Inc. MatWeb is intended for personal, non-commercial use. The contents, results, and technical data from this site may not be reproduced either in whole or in part without permission from Automation Creations, Inc.





Data on over 31,000 metals, plastics, ceramics, and composites.

HELP WANTED! • HOME • SEARCH • TOOLS • FORUM • SERVICES • HEL

Searches: Sequential | Material Type | Property | Composition | Trade Name | Manufacturer



MATERIAL PROPERTY DATA

## Ticona Vectra® A430 Liquid Crystal Polymer (LCP), LCP/PTF

[Printer friendly version](#)
[Download to Excel \(requires Excel and Windows\)](#)
**Subcategory:** Liquid Crystal Polymer (LCP); Polymer; Thermoplastic**Key Words:** Hoechst Celanese Corporation**Material Notes:**

Data provided by M. A. Hanna.

No vendors are listed for this material. Please [click here](#) if you are a supplier and would like information on how to**Physical Properties**

	Metric	English
Density	<u>1.5 g/cc</u>	0.0542 lb/in <sup>3</sup>

**Mechanical Properties**

Tensile Strength, Ultimate	<u>175 MPa</u>	25400 psi
Elongation at Break	6.2 %	6.2 %
Tensile Modulus	<u>10 GPa</u>	1450 ksi
Flexural Modulus	<u>8 GPa</u>	1160 ksi
Flexural Yield Strength	<u>130 MPa</u>	18900 psi
Compressive Yield Strength	<u>38 MPa</u>	5510 psi
Charpy Impact, Notched	NB	NB
Compressive Modulus	<u>6 GPa</u>	870 ksi
Coefficient of Friction	0.18	0.18
Izod Impact, Notched (ISO)	<u>55 kJ/m<sup>2</sup></u>	26.2 ft-lb/in <sup>2</sup>

**Electrical Properties**

Electrical Resistivity	<u>1e+012 ohm-cm</u>	1e+012 ohm-cm
Surface Resistance	1e+015 ohm	1e+015 ohm
Dielectric Constant	2.9	2.9
Dielectric Constant, Low Frequency	3.2	3.2
Dissipation Factor	0.008	0.008

Dissipation Factor, Low Frequency	0.02	0.02
Arc Resistance	<u>130 sec</u>	130 sec
Comparative Tracking Index	225 V	225 V

**Thermal Properties**

CTE, linear 20°C	<u>-10 µm/m-°C</u>	-5.56 µin/in-°F	
CTE, linear 20°C Transverse to Flow	<u>100 µm/m-°C</u>	55.6 µin/in-°F	
CTE, linear 100°C	<u>-10 µm/m-°C</u>	-5.56 µin/in-°F	Flow
CTE, linear 100°C	<u>100 µm/m-°C</u>	55.6 µin/in-°F	Transverse
Melting Point	<u>280 °C</u>	536 °F	
Maximum Service Temperature, Air	<u>130 °C</u>	266 °F	
Deflection Temperature at 1.8 MPa (264 psi)	<u>165 °C</u>	329 °F	
UL RTI, Electrical	<u>130 °C</u>	266 °F	
UL RTI, Mechanical with Impact	<u>130 °C</u>	266 °F	
Flammability, UL94	V-0	V-0	

Some of the values displayed above may have been converted from their original units and/or rounded in order to display the information in a consistent manner. For scientific or engineering calculations you can click on the property value to see the original value as well as raw conversions to equivalent units. We advise you to use one of its raw conversions in your calculations to minimize rounding error. We also ask that you refer to MatWeb's disclaimer and terms of use regarding property values for this datasheet as they were originally entered into MatWeb.

**Subscribe to Premium Services**

**Searches:** Sequential • Composition • Property • Material Type • Manufacturer • Trade Name • UL  
**Other Links:** Advertising • Submit Data • Database Licensing • Web Design & Hosting • Trade Publications  
 Supplier List • Unit Converter • Reference • News • Links • Help • Contact Us • Site Map •

Please read our License Agreement regarding materials data and our Privacy Policy. Questions or comments about MatWeb? Please contact us and we will appreciate your input.

Site designed and maintained by Automation Creations, Inc. The contents of this web site, the MatWeb logo, and "MatWeb" are Copyright 1995-2003 Automation Creations, Inc. MatWeb is intended for personal, non-commercial use. The contents, results, and technical data from this site may not be reproduced either in whole or in part without permission from Automation Creations, Inc.



Data on over 31,000 metals, plastics, ceramics, and composites.

HELP WANTED! • HOME • SEARCH • TOOLS • FORUM • SERVICES • HEL

Searches: Sequential | Material Type | Property | Composition | Trade Name | Manufacturer



## Ticona Vectra® A422 Liquid Crystal Polymer (LCP), Glass/Grap

[Printer friendly version](#)
[Download to Excel \(requires Excel and Windows\)](#)
**Subcategory:** Filled/Reinforced Thermoplastic; Liquid Crystal Polymer (LCP); Polymer; Thermoplastic**Key Words:** Hoechst Celanese Corporation**Material Notes:**

Data provided by M. A. Hanna.

No vendors are listed for this material. Please [click here](#) if you are a supplier and would like information on how to**Physical Properties**

	<b>Metric</b>	<b>English</b>
Density	<u>1.68 g/cc</u>	0.0607 lb/in <sup>3</sup>
Water Absorption	0.02 %	0.02 %
Moisture Absorption at Equilibrium	0.02 %	0.02 %
Linear Mold Shrinkage	<u>0.001 cm/cm</u>	0.001 in/in
Linear Mold Shrinkage, Transverse	<u>0.003 cm/cm</u>	0.003 in/in

**Mechanical Properties**

Tensile Strength, Ultimate	<u>180 MPa</u>	26100 psi
Elongation at Break	2.3 %	2.3 %
Tensile Modulus	<u>20 GPa</u>	2900 ksi
Flexural Modulus	<u>16.5 GPa</u>	2390 ksi
Flexural Yield Strength	<u>250 MPa</u>	36300 psi
Compressive Yield Strength	<u>120 MPa</u>	17400 psi
Charpy Impact, Notched	<u>2.1 J/cm<sup>2</sup></u>	9.99 ft-lb/in <sup>2</sup>
Compressive Modulus	<u>18.5 GPa</u>	2680 ksi
Coefficient of Friction	0.18	0.18
Izod Impact, Notched (ISO)	<u>22 kJ/m<sup>2</sup></u>	10.5 ft-lb/in <sup>2</sup>

**Electrical Properties**

Electrical Resistivity	<u>1e+012 ohm-cm</u>	1e+012 ohm-cm
------------------------	----------------------	---------------

Surface Resistance	1e+015 ohm	1e+015 ohm
Dielectric Constant	6.2	6.2
Dielectric Constant, Low Frequency	7.4	7.4
Dissipation Factor	0.02	0.02
Dissipation Factor, Low Frequency	0.03	0.03
Arc Resistance	<u>125 sec</u>	125 sec
Comparative Tracking Index	225 V	225 V

**Thermal Properties**

CTE, linear 20°C	<u>3 µm/m-°C</u>	1.67 µin/in-°F	
CTE, linear 20°C Transverse to Flow	<u>58 µm/m-°C</u>	32.2 µin/in-°F	
CTE, linear 100°C	<u>3 µm/m-°C</u>	1.67 µin/in-°F	Flow
CTE, linear 100°C	<u>58 µm/m-°C</u>	32.2 µin/in-°F	Transverse
Melting Point	<u>280 °C</u>	536 °F	
Maximum Service Temperature, Air	<u>130 °C</u>	266 °F	
Deflection Temperature at 1.8 MPa (264 psi)	<u>230 °C</u>	446 °F	
UL RTI, Electrical	<u>130 °C</u>	266 °F	
UL RTI, Mechanical with Impact	<u>130 °C</u>	266 °F	
Flammability, UL94	V-0	V-0	

Some of the values displayed above may have been converted from their original units and/or rounded in order to display the information in a consistent manner. For scientific or engineering calculations you can click on the property value to see the original value as well as raw conversions to equivalent units. We advise you to use one of its raw conversions in your calculations to minimize rounding error. We also ask that you refer to MatWeb's disclaimer and terms of use regarding property values for this datasheet as they were originally entered into MatWeb.

**Subscribe to Premium Services**

**Searches:** Sequential • Composition • Property • Material Type • Manufacturer • Trade Name • Unit Converter  
**Other Links:** Advertising • Submit Data • Database Licensing • Web Design & Hosting • Trade Publications • Supplier List • Unit Converter • Reference • News • Links • Help • Contact Us • Site Map •

Please read our License Agreement regarding materials data and our Privacy Policy. Questions or comments about MatWeb? Please contact us and we will appreciate your input.

Site designed and maintained by Automation Creations, Inc. The contents of this web site, the MatWeb logo, and "MatWeb" are Copyright 1995-2003 Automation Creations, Inc. MatWeb is intended for personal, non-commercial use. The contents, results, and technical data from this site may not be reproduced either in whole or in part without permission from Automation Creations, Inc.



Data on over 31,000 metals, plastics, ceramics, and composites.

HELP WANTED! • HOME • SEARCH • TOOLS • FORUM • SERVICES • HEL

Searches: Sequential | Material Type | Property | Composition | Trade Name | Manufacturer



## Ticona Vectra® A420 Liquid Crystal Polymer (LCP), Glass/Mineral/(

[Printer friendly version](#)
[Download to Excel \(requires Excel and Windows\)](#)

**Subcategory:** Filled/Reinforced Thermoplastic; Liquid Crystal Polymer (LCP); Polymer; Thermoplastic

**Key Words:** Hoechst Celanese Corporation

**Material Notes:**

Data provided by M. A. Hanna.

No vendors are listed for this material. Please [click here](#) if you are a supplier and would like information on how to

### Physical Properties

	Metric	English
Density	<u>1.89 g/cc</u>	0.0683 lb/in <sup>3</sup>
Water Absorption	0.02 %	0.02 %
Moisture Absorption at Equilibrium	0.02 %	0.02 %
Linear Mold Shrinkage	<u>0.001 cm/cm</u>	0.001 in/in
Linear Mold Shrinkage, Transverse	<u>0.002 cm/cm</u>	0.002 in/in

### Mechanical Properties

Hardness, Rockwell M	79	79
Tensile Strength, Ultimate	<u>145 MPa</u>	21000 psi
Elongation at Break	1.4 %	1.4 %
Tensile Modulus	<u>22 GPa</u>	3190 ksi
Flexural Modulus	<u>20 GPa</u>	2900 ksi
Flexural Yield Strength	<u>200 MPa</u>	29000 psi
Compressive Yield Strength	<u>131 MPa</u>	19000 psi
Charpy Impact, Notched	<u>0.8 J/cm<sup>2</sup></u>	3.81 ft-lb/in <sup>2</sup>
Compressive Modulus	<u>21.5 GPa</u>	3120 ksi
Coefficient of Friction	0.17	0.17
Izod Impact, Notched (ISO)	<u>6 kJ/m<sup>2</sup></u>	2.86 ft-lb/in <sup>2</sup>

### Electrical Properties

Electrical Resistivity	<u>1e+012 ohm-cm</u>	1e+012 ohm-cm
Surface Resistance	1e+016 ohm	1e+016 ohm
Dielectric Constant	5.9	5.9
Dielectric Constant, Low Frequency	6.7	6.7
Dissipation Factor	0.02	0.02
Dissipation Factor, Low Frequency	0.02	0.02
Arc Resistance	<u>180 sec</u>	180 sec
Comparative Tracking Index	250 V	250 V

**Thermal Properties**

CTE, linear 20°C	<u>11 µm/m-°C</u>	6.11 µin/in-°F	
CTE, linear 20°C Transverse to Flow	<u>51 µm/m-°C</u>	28.3 µin/in-°F	
CTE, linear 100°C	<u>11 µm/m-°C</u>	6.11 µin/in-°F	Flow
CTE, linear 100°C	<u>51 µm/m-°C</u>	28.3 µin/in-°F	Transverse
Melting Point	<u>280 °C</u>	536 °F	
Maximum Service Temperature, Air	<u>130 °C</u>	266 °F	
Deflection Temperature at 1.8 MPa (264 psi)	<u>230 °C</u>	446 °F	
Vicat Softening Point	<u>238 °C</u>	460 °F	
UL RTI, Electrical	<u>130 °C</u>	266 °F	
UL RTI, Mechanical with Impact	<u>130 °C</u>	266 °F	
Flammability, UL94	V-0	V-0	

Some of the values displayed above may have been converted from their original units and/or rounded in order to display the information in a consistent format. For scientific or engineering calculations, you can click on the property value to see the original value as well as raw conversions to equivalent units. We advise you to use one of its raw conversions in your calculations to minimize rounding error. We also ask that you refer to MatWeb's disclaimer and terms of use regarding property values for this datasheet as they were originally entered into MatWeb.

**Subscribe to Premium Services**

**Searches:** Sequential • Composition • Property • Material Type • Manufacturer • Trade Name • UL  
**Other Links:** Advertising • Submit Data • Database Licensing • Web Design & Hosting • Trade Publications  
 Supplier List • Unit Converter • Reference • News • Links • Help • Contact Us • Site Map •

Please read our License Agreement regarding materials data and our Privacy Policy. Questions or comments about MatWeb? Please contact us and we will appreciate your input.

Site designed and maintained by Automation Creations, Inc. The contents of this web site, the MatWeb logo, and "MatWeb" are Copyright 1995-2003 Automation Creations, Inc. MatWeb is intended for personal, non-commercial use. The contents, results, and technical data from this site may not be reproduced either in whole or in part without permission from Automation Creations, Inc.



Data on over 31,000 metals, plastics, ceramics, and composites.

HELP WANTED! • HOME • SEARCH • TOOLS • FORUM • SERVICES • HEL

Searches: Sequential | Material Type | Property | Composition | Trade Name | Manufacturer



## Ticona Vectra® A410 Liquid Crystal Polymer (LCP), 25% Glass/25%

[Printer friendly version](#)
[Download to Excel \(requires Excel and Windows\)](#)

**Subcategory:** Filled/Reinforced Thermoplastic; Liquid Crystal Polymer (LCP); Polymer; Thermoplastic

**Key Words:** Hoechst Celanese Corporation

**Material Notes:**

Data provided by M. A. Hanna.

No vendors are listed for this material. Please [click here](#) if you are a supplier and would like information on how to

### Physical Properties

	Metric	English
Density	<u>1.84 g/cc</u>	0.0665 lb/in <sup>3</sup>
Water Absorption	0.04 %	0.04 %
Moisture Absorption at Equilibrium	0.04 %	0.04 %
Linear Mold Shrinkage	<u>0.002 cm/cm</u>	0.002 in/in
Linear Mold Shrinkage, Transverse	<u>0.003 cm/cm</u>	0.003 in/in

### Mechanical Properties

Hardness, Rockwell M	76	76
Tensile Strength, Ultimate	<u>150 MPa</u>	21800 psi
Elongation at Break	2 %	2 %
Tensile Modulus	<u>20 GPa</u>	2900 ksi
Flexural Modulus	<u>18 GPa</u>	2610 ksi
Flexural Yield Strength	<u>220 MPa</u>	31900 psi
Compressive Yield Strength	<u>116 MPa</u>	16800 psi
Charpy Impact, Notched	<u>0.8 J/cm<sup>2</sup></u>	3.81 ft-lb/in <sup>2</sup>
Compressive Modulus	<u>19 GPa</u>	2760 ksi
Coefficient of Friction	0.21	0.21
Izod Impact, Notched (ISO)	<u>12 kJ/m<sup>2</sup></u>	5.71 ft-lb/in <sup>2</sup>

### Electrical Properties

Electrical Resistivity	<u>1e+012 ohm-cm</u>	1e+012 ohm-cm
Surface Resistance	1e+016 ohm	1e+016 ohm
Dielectric Constant	3.9	3.9
Dielectric Constant, Low Frequency	4.4	4.4
Dissipation Factor	0.007	0.007
Dissipation Factor, Low Frequency	0.02	0.02
Arc Resistance	<u>180 sec</u>	180 sec
Comparative Tracking Index	175 V	175 V

**Thermal Properties**

CTE, linear 20°C	<u>5 µm/m-°C</u>	2.78 µin/in-°F	
CTE, linear 20°C Transverse to Flow	<u>66 µm/m-°C</u>	36.7 µin/in-°F	
CTE, linear 100°C	<u>5 µm/m-°C</u>	2.78 µin/in-°F	Flow
CTE, linear 100°C	<u>66 µm/m-°C</u>	36.7 µin/in-°F	Transverse
Melting Point	<u>280 °C</u>	536 °F	
Maximum Service Temperature, Air	<u>130 °C</u>	266 °F	
Deflection Temperature at 1.8 MPa (264 psi)	<u>235 °C</u>	455 °F	
Vicat Softening Point	<u>235 °C</u>	455 °F	
UL RTI, Electrical	<u>130 °C</u>	266 °F	
UL RTI, Mechanical with Impact	<u>130 °C</u>	266 °F	
Flammability, UL94	V-0	V-0	

Some of the values displayed above may have been converted from their original units and/or rounded in order to display the information in a consistent format. For scientific or engineering calculations you can click on the property value to see the original value as well as raw conversions to equivalent units. We advise you to use one of its raw conversions in your calculations to minimize rounding error. We also ask that you refer to MatWeb's disclaimer and terms of use regarding property values for this datasheet as they were originally entered into MatWeb.

**Subscribe to Premium Services**

**Searches:** Sequential • Composition • Property • Material Type • Manufacturer • Trade Name • Unit Converter  
**Other Links:** Advertising • Submit Data • Database Licensing • Web Design & Hosting • Trade Publications • Supplier List • Unit Converter • Reference • News • Links • Help • Contact Us • Site Map •

Please read our License Agreement regarding materials data and our Privacy Policy. Questions or comments about MatWeb? Please contact us and we will appreciate your input.

Site designed and maintained by Automation Creations, Inc. The contents of this web site, the MatWeb logo, and "MatWeb" are Copyright 1995-2003 Automation Creations, Inc. MatWeb is intended for personal, non-commercial use. The contents, results, and technical data from this site may not be reproduced either in whole or in part without permission from Automation Creations, Inc.





Data on over 31,000 metals, plastics, ceramics, and composites.

HELP WANTED! • HOME • SEARCH • TOOLS • FORUM • SERVICES • HEL

Searches: Sequential | Material Type | Property | Composition | Trade Name | Manufacturer



## Ticona Vectra® A230 Liquid Crystal Polymer (LCP), 30% Carbon Fil

[Printer friendly version](#)
[Download to Excel \(requires Excel and Windows\)](#)
**Subcategory:** Filled/Reinforced Thermoplastic; Liquid Crystal Polymer (LCP); Polymer; Thermoplastic**Key Words:** Hoechst Celanese Corporation**Material Notes:**

Data provided by M. A. Hanna.

No vendors are listed for this material. Please [click here](#) if you are a supplier and would like information on how to**Physical Properties**

	<b>Metric</b>	<b>English</b>
Density	<u>1.49 g/cc</u>	0.0538 lb/in <sup>3</sup>
Water Absorption	0.03 %	0.03 %
Moisture Absorption at Equilibrium	0.03 %	0.03 %
Linear Mold Shrinkage	<u>0.001 cm/cm</u>	0.001 in/in
Linear Mold Shrinkage, Transverse	<u>0.002 cm/cm</u>	0.002 in/in

**Mechanical Properties**

Hardness, Rockwell M	83	83
Tensile Strength, Ultimate	<u>125 MPa</u>	18100 psi
Elongation at Break	0.8 %	0.8 %
Tensile Modulus	<u>24.5 GPa</u>	3550 ksi
Flexural Modulus	<u>23 GPa</u>	3340 ksi
Flexural Yield Strength	<u>220 MPa</u>	31900 psi
Compressive Yield Strength	<u>136 MPa</u>	19700 psi
Charpy Impact, Notched	<u>1.5 J/cm<sup>2</sup></u>	7.14 ft-lb/in <sup>2</sup>
Tensile Impact Strength	<u>60 kJ/m<sup>2</sup></u>	28.6 ft-lb/in <sup>2</sup>
Compressive Modulus	<u>23.5 GPa</u>	3410 ksi
Coefficient of Friction	0.12	0.12
Izod Impact, Notched (ISO)	<u>15 kJ/m<sup>2</sup></u>	7.14 ft-lb/in <sup>2</sup>

**Electrical Properties**

Electrical Resistivity	<u>0.1 ohm-cm</u>	0.1 ohm-cm
------------------------	-------------------	------------

**Thermal Properties**

CTE, linear 20°C	<u>-8 µm/m-°C</u>	-4.44 µin/in-°F	
CTE, linear 20°C Transverse to Flow	<u>58 µm/m-°C</u>	32.2 µin/in-°F	
CTE, linear 100°C	<u>-8 µm/m-°C</u>	-4.44 µin/in-°F	Flow
CTE, linear 100°C	<u>58 µm/m-°C</u>	32.2 µin/in-°F	Transverse
Melting Point	<u>280 °C</u>	536 °F	
Maximum Service Temperature, Air	<u>130 °C</u>	266 °F	
Deflection Temperature at 1.8 MPa (264 psi)	<u>225 °C</u>	437 °F	
Vicat Softening Point	<u>232 °C</u>	450 °F	
UL RTI, Electrical	<u>130 °C</u>	266 °F	
UL RTI, Mechanical with Impact	<u>130 °C</u>	266 °F	
Flammability, UL94	V-0	V-0	

Some of the values displayed above may have been converted from their original units and/or rounded in order to display the information in a consistent manner. For scientific or engineering calculations, you can click on the property value to see the original value as well as raw conversions to equivalent units. We advise you to use one of its raw conversions in your calculations to minimize rounding error. We also ask that you refer to MatWeb's disclaimer and terms of use regarding property values for this datasheet as they were originally entered into MatWeb.

**Subscribe to Premium Services**

**Searches:** Sequential • Composition • Property • Material Type • Manufacturer • Trade Name • Unit Converter  
**Other Links:** Advertising • Submit Data • Database Licensing • Web Design & Hosting • Trade Publications • Supplier List • Unit Converter • Reference • News • Links • Help • Contact Us • Site Map •

Please read our License Agreement regarding materials data and our Privacy Policy. Questions or comments about MatWeb? Please contact us and we will appreciate your input.

Site designed and maintained by Automation Creations, Inc. The contents of this web site, the MatWeb logo, and "MatWeb" are Copyright 1998-2003 Automation Creations, Inc. MatWeb is intended for personal, non-commercial use. The contents, results, and technical data from this site may not be reproduced either in whole or in part without permission from Automation Creations, Inc.



Data on over 31,000 metals, plastics, ceramics, and composites.

HELP WANTED! • HOME • SEARCH • TOOLS • FORUM • SERVICES • HEL

Searches: Sequential | Material Type | Property | Composition | Trade Name | Manufacturer



## Ticona Vectra® V140 Liquid Crystal Polymer (LCP), 40% Glass I

[Printer friendly version](#)
[Download to Excel \(requires Excel and Windows\)](#)

**Subcategory:** Filled/Reinforced Thermoplastic; Liquid Crystal Polymer (LCP); Polymer; Thermoplastic

**Key Words:** Hoechst Celanese Corporation

**Material Notes:**

Data provided by M. A. Hanna.

No vendors are listed for this material. Please [click here](#) if you are a supplier and would like information on how to

### Physical Properties

	Metric	English
Density	<u>1.67 g/cc</u>	0.0603 lb/in <sup>3</sup>
Water Absorption	0.02 %	0.02 %
Moisture Absorption at Equilibrium	0.02 %	0.02 %
Linear Mold Shrinkage	<u>0.002 cm/cm</u>	0.002 in/in
Linear Mold Shrinkage, Transverse	<u>0.004 cm/cm</u>	0.004 in/in

### Mechanical Properties

Tensile Strength, Ultimate	<u>130 MPa</u>	18900 psi
Elongation at Break	1 %	1 %
Tensile Modulus	<u>18 GPa</u>	2610 ksi
Flexural Modulus	<u>16 GPa</u>	2320 ksi
Flexural Yield Strength	<u>210 MPa</u>	30500 psi
Compressive Yield Strength	<u>134 MPa</u>	19400 psi
Charpy Impact, Notched	<u>1.1 J/cm<sup>2</sup></u>	5.24 ft-lb/in <sup>2</sup>
Compressive Modulus	<u>16 GPa</u>	2320 ksi
Izod Impact, Notched (ISO)	<u>7 kJ/m<sup>2</sup></u>	3.33 ft-lb/in <sup>2</sup>

### Electrical Properties

Electrical Resistivity	<u>1e+012 ohm-cm</u>	1e+012 ohm-cm
Surface Resistance	1e+017 ohm	1e+017 ohm

Dielectric Constant	3.7	3.7
Dielectric Constant, Low Frequency	3.8	3.8
Dissipation Factor	0.002	0.002
Dissipation Factor, Low Frequency	0.007	0.007
Arc Resistance	<u>165 sec</u>	165 sec
Comparative Tracking Index	175 V	175 V

**Thermal Properties**

CTE, linear 20°C	<u>10 <math>\mu\text{m}/\text{m}\cdot^\circ\text{C}</math></u>	5.56 $\mu\text{in}/\text{in}\cdot^\circ\text{F}$	
CTE, linear 20°C Transverse to Flow	<u>67 <math>\mu\text{m}/\text{m}\cdot^\circ\text{C}</math></u>	37.2 $\mu\text{in}/\text{in}\cdot^\circ\text{F}$	
CTE, linear 100°C	<u>10 <math>\mu\text{m}/\text{m}\cdot^\circ\text{C}</math></u>	5.56 $\mu\text{in}/\text{in}\cdot^\circ\text{F}$	Flow
CTE, linear 100°C	<u>67 <math>\mu\text{m}/\text{m}\cdot^\circ\text{C}</math></u>	37.2 $\mu\text{in}/\text{in}\cdot^\circ\text{F}$	Transverse
Melting Point	<u>280 °C</u>	536 °F	
Maximum Service Temperature, Air	<u>270 °C</u>	518 °F	[
Deflection Temperature at 1.8 MPa (264 psi)	<u>270 °C</u>	518 °F	
Flammability, UL94	V-0	V-0	

Some of the values displayed above may have been converted from their original units and/or rounded in order to display the information in a consistent format. For scientific or engineering calculations you can click on the property value to see the original value as well as raw conversions to equivalent units. We advise you to use one of its raw conversions in your calculations to minimize rounding error. We also ask that you refer to MatWeb's disclaimer and terms of use regarding property values for this datasheet as they were originally entered into MatWeb.

**Subscribe to Premium Services**

**Searches:** Sequential • Composition • Property • Material Type • Manufacturer • Trade Name • Unit  
**Other Links:** Advertising • Submit Data • Database Licensing • Web Design & Hosting • Trade Publication  
 Supplier List • Unit Converter • Reference • News • Links • Help • Contact Us • Site Map •

Please read our License Agreement regarding materials data and our Privacy Policy. Questions or comments about MatWeb? Please contact us and we will appreciate your input.

Site designed and maintained by Automation Creations, Inc. The contents of this web site, the MatWeb logo, and "MatWeb" are Copyright 1995-2003 Automation Creations, Inc. MatWeb is intended for personal, non-commercial use. The contents, results, and technical data from this site may not be reproduced either in whole or in part without permission from Automation Creations, Inc.



Data on over 31,000 metals, plastics, ceramics, and composites.

HELP WANTED! • HOME • SEARCH • TOOLS • FORUM • SERVICES • HEL

Searches: Sequential | Material Type | Property | Composition | Trade Name | Manufacturer



## Ticona Vectra® L130 Liquid Crystal Polymer (LCP), 30% Glass I

[Printer friendly version](#)
[Download to Excel \(requires Excel and Windows\)](#)

**Subcategory:** Filled/Reinforced Thermoplastic; Liquid Crystal Polymer (LCP); Polymer; Thermoplastic

**Key Words:** Hoechst Celanese Corporation

**Material Notes:**

Data provided by M. A. Hanna.

No vendors are listed for this material. Please [click here](#) if you are a supplier and would like information on how to

### Physical Properties

	Metric	English
Density	<u>1.61 g/cc</u>	0.0582 lb/in <sup>3</sup>
Water Absorption	0.04 %	0.04 %
Moisture Absorption at Equilibrium	0.04 %	0.04 %
Linear Mold Shrinkage	<u>0.001 cm/cm</u>	0.001 in/in
Linear Mold Shrinkage, Transverse	<u>0.002 cm/cm</u>	0.002 in/in

### Mechanical Properties

Tensile Strength, Ultimate	<u>155 MPa</u>	22500 psi
Elongation at Break	1.6 %	1.6 %
Tensile Modulus	<u>15 GPa</u>	2180 ksi
Flexural Modulus	<u>16 GPa</u>	2320 ksi
Flexural Yield Strength	<u>230 MPa</u>	33400 psi
Compressive Yield Strength	<u>100 MPa</u>	14500 psi
Charpy Impact, Notched	<u>4.3 J/cm<sup>2</sup></u>	20.5 ft-lb/in <sup>2</sup>
Compressive Modulus	<u>14 GPa</u>	2030 ksi
Izod Impact, Notched (ISO)	<u>23 kJ/m<sup>2</sup></u>	10.9 ft-lb/in <sup>2</sup>

### Electrical Properties

Electrical Resistivity	<u>1e+012 ohm-cm</u>	1e+012 ohm-cm
Surface Resistance	1e+017 ohm	1e+017 ohm

Dielectric Constant	3.3	3.3
Dielectric Constant, Low Frequency	3.8	3.8
Dissipation Factor	0.02	0.02
Dissipation Factor, Low Frequency	0.02	0.02
Arc Resistance	<u>130 sec</u>	130 sec
Comparative Tracking Index	175 V	175 V

**Thermal Properties**

CTE, linear 20°C	<u>5 <math>\mu\text{m}/\text{m}\cdot^\circ\text{C}</math></u>	2.78 $\mu\text{in}/\text{in}\cdot^\circ\text{F}$	
CTE, linear 20°C Transverse to Flow	<u>65 <math>\mu\text{m}/\text{m}\cdot^\circ\text{C}</math></u>	36.1 $\mu\text{in}/\text{in}\cdot^\circ\text{F}$	
CTE, linear 100°C	<u>5 <math>\mu\text{m}/\text{m}\cdot^\circ\text{C}</math></u>	2.78 $\mu\text{in}/\text{in}\cdot^\circ\text{F}$	Flow
CTE, linear 100°C	<u>65 <math>\mu\text{m}/\text{m}\cdot^\circ\text{C}</math></u>	36.1 $\mu\text{in}/\text{in}\cdot^\circ\text{F}$	Transverse
Melting Point	<u>302 °C</u>	576 °F	
Maximum Service Temperature, Air	<u>130 °C</u>	266 °F	
Deflection Temperature at 1.8 MPa (264 psi)	<u>235 °C</u>	455 °F	
UL RTI, Electrical	<u>130 °C</u>	266 °F	
UL RTI, Mechanical with Impact	<u>130 °C</u>	266 °F	
Flammability, UL94	V-0	V-0	
Oxygen Index	45 %	45 %	

Some of the values displayed above may have been converted from their original units and/or rounded in order to display the information in a consistent format. For scientific or engineering calculations you can click on the property value to see the original value as well as raw conversions to equivalent units. We advise you to use one of its raw conversions in your calculations to minimize rounding error. We also ask that you refer to MatWeb's disclaimer and terms of use regarding property values for this datasheet as they were originally entered into MatWeb.

**Subscribe to Premium Services**

**Searches:** Sequential • Composition • Property • Material Type • Manufacturer • Trade Name • Unit Converter  
**Other Links:** Advertising • Submit Data • Database Licensing • Web Design & Hosting • Trade Publications • Supplier List • Unit Converter • Reference • News • Links • Help • Contact Us • Site Map •

Please read our License Agreement regarding materials data and our Privacy Policy. Questions or comments about MatWeb? Please contact us and we will appreciate your input.

Site designed and maintained by Automation Creations, Inc. The contents of this web site, the MatWeb logo, and "MatWeb" are Copyright 1995-2003 Automation Creations, Inc. MatWeb is intended for personal, non-commercial use. The contents, results, and technical data from this site may not be reproduced either in whole or in part without permission from Automation Creations, Inc.



Data on over 31,000 metals, plastics, ceramics, and composites.

HELP WANTED! • HOME • SEARCH • TOOLS • FORUM • SERVICES • HEL

Searches: Sequential | Material Type | Property | Composition | Trade Name | Manufacturer



## Ticona Vectra® K140 Liquid Crystal Polymer (LCP), 40% Glass I

[Printer friendly version](#)
[Download to Excel \(requires Excel and Windows\)](#)
**Subcategory:** Filled/Reinforced Thermoplastic; Liquid Crystal Polymer (LCP); Polymer; Thermoplastic**Key Words:** Hoechst Celanese Corporation**Material Notes:**

Data provided by M. A. Hanna.

No vendors are listed for this material. Please [click here](#) if you are a supplier and would like information on how to**Physical Properties**

	Metric	English
Density	<u>1.71 g/cc</u>	0.0618 lb/in <sup>3</sup>
Water Absorption	0.04 %	0.04 %
Moisture Absorption at Equilibrium	0.04 %	0.04 %
Linear Mold Shrinkage	<u>0.001 cm/cm</u>	0.001 in/in
Linear Mold Shrinkage, Transverse	<u>0.002 cm/cm</u>	0.002 in/in

**Mechanical Properties**

Tensile Strength, Ultimate	<u>160 MPa</u>	23200 psi
Elongation at Break	1.2 %	1.2 %
Tensile Modulus	<u>20 GPa</u>	2900 ksi
Flexural Modulus	<u>18 GPa</u>	2610 ksi
Flexural Yield Strength	<u>245 MPa</u>	35500 psi
Compressive Yield Strength	<u>127 MPa</u>	18400 psi
Charpy Impact, Notched	<u>1.4 J/cm<sup>2</sup></u>	6.66 ft-lb/in <sup>2</sup>
Compressive Modulus	<u>18 GPa</u>	2610 ksi
Izod Impact, Notched (ISO)	<u>14 kJ/m<sup>2</sup></u>	6.66 ft-lb/in <sup>2</sup>

**Electrical Properties**

Electrical Resistivity	<u>1e+012 ohm-cm</u>	1e+012 ohm-cm
Surface Resistance	1e+017 ohm	1e+017 ohm

Dielectric Constant	3.6	3.6
Dielectric Constant, Low Frequency	4.1	4.1
Dissipation Factor	0.01	0.01
Dissipation Factor, Low Frequency	0.02	0.02
Arc Resistance	<u>140 sec</u>	140 sec
Comparative Tracking Index	175 V	175 V

**Thermal Properties**

CTE, linear 20°C	<u>3 <math>\mu\text{m/m-}^\circ\text{C}</math></u>	1.67 $\mu\text{in/in-}^\circ\text{F}$	
CTE, linear 20°C Transverse to Flow	<u>79 <math>\mu\text{m/m-}^\circ\text{C}</math></u>	43.9 $\mu\text{in/in-}^\circ\text{F}$	
CTE, linear 100°C	<u>3 <math>\mu\text{m/m-}^\circ\text{C}</math></u>	1.67 $\mu\text{in/in-}^\circ\text{F}$	Flow
CTE, linear 100°C	<u>79 <math>\mu\text{m/m-}^\circ\text{C}</math></u>	43.9 $\mu\text{in/in-}^\circ\text{F}$	Transverse
Melting Point	<u>320 <math>^\circ\text{C}</math></u>	608 $^\circ\text{F}$	
Maximum Service Temperature, Air	<u>130 <math>^\circ\text{C}</math></u>	266 $^\circ\text{F}$	
Deflection Temperature at 1.8 MPa (264 psi)	<u>217 <math>^\circ\text{C}</math></u>	423 $^\circ\text{F}$	
UL RTI, Electrical	<u>130 <math>^\circ\text{C}</math></u>	266 $^\circ\text{F}$	
UL RTI, Mechanical with Impact	<u>130 <math>^\circ\text{C}</math></u>	266 $^\circ\text{F}$	
Flammability, UL94	V-0	V-0	

Some of the values displayed above may have been converted from their original units and/or rounded in order to display the information in a consistent manner. For scientific or engineering calculations, you can click on the property value to see the original value as well as raw conversions to equivalent units. We advise you to use one of its raw conversions in your calculations to minimize rounding error. We also ask that you refer to MatWeb's disclaimer and terms of use regarding property values for this datasheet as they were originally entered into MatWeb.

**Subscribe to Premium Services**

**Searches:** Sequential • Composition • Property • Material Type • Manufacturer • Trade Name • Unit Converter  
**Other Links:** Advertising • Submit Data • Database Licensing • Web Design & Hosting • Trade Publications • Supplier List • Unit Converter • Reference • News • Links • Help • Contact Us • Site Map •

Please read our License Agreement regarding materials data and our Privacy Policy. Questions or comments about MatWeb? Please contact us and we will appreciate your input.

Site designed and maintained by Automation Creations, Inc. The contents of this web site, the MatWeb logo, and "MatWeb" are Copyright 1998-2003 Automation Creations, Inc. MatWeb is intended for personal, non-commercial use. The contents, results, and technical data from this site may not be reproduced either in whole or in part without permission from Automation Creations, Inc.





Data on over 31,000 metals, plastics, ceramics, and composites.

HELP WANTED! • HOME • SEARCH • TOOLS • FORUM • SERVICES • HEL

Searches: Sequential | Material Type | Property | Composition | Trade Name | Manufacturer



## Ticona Vectra® K130 Liquid Crystal Polymer (LCP), 30% Glass I

[Printer friendly version](#)
[Download to Excel \(requires Excel and Windows\)](#)

**Subcategory:** Filled/Reinforced Thermoplastic; Liquid Crystal Polymer (LCP); Polymer; Thermoplastic

**Key Words:** Hoechst Celanese Corporation

**Material Notes:**

Data provided by M. A. Hanna.

No vendors are listed for this material. Please [click here](#) if you are a supplier and would like information on how to

### Physical Properties

	Metric	English
Density	<u>1.61 g/cc</u>	0.0582 lb/in <sup>3</sup>
Water Absorption	0.04 %	0.04 %
Moisture Absorption at Equilibrium	0.04 %	0.04 %
Linear Mold Shrinkage	<u>0.001 cm/cm</u>	0.001 in/in
Linear Mold Shrinkage, Transverse	<u>0.002 cm/cm</u>	0.002 in/in

### Mechanical Properties

Tensile Strength, Ultimate	<u>165 MPa</u>	23900 psi
Elongation at Break	1.3 %	1.3 %
Tensile Modulus	<u>18 GPa</u>	2610 ksi
Flexural Modulus	<u>16 GPa</u>	2320 ksi
Flexural Yield Strength	<u>245 MPa</u>	35500 psi
Compressive Yield Strength	<u>111 MPa</u>	16100 psi
Charpy Impact, Notched	<u>1.8 J/cm<sup>2</sup></u>	8.57 ft-lb/in <sup>2</sup>
Compressive Modulus	<u>15 GPa</u>	2180 ksi
Izod Impact, Notched (ISO)	<u>16 kJ/m<sup>2</sup></u>	7.61 ft-lb/in <sup>2</sup>

### Electrical Properties

Electrical Resistivity	<u>1e+012 ohm-cm</u>	1e+012 ohm-cm
Surface Resistance	1e+017 ohm	1e+017 ohm

Dielectric Constant	3.4	3.4
Dielectric Constant, Low Frequency	3.9	3.9
Dissipation Factor	0.01	0.01
Dissipation Factor, Low Frequency	0.02	0.02
Arc Resistance	<u>130 sec</u>	130 sec
Comparative Tracking Index	175 V	175 V

**Thermal Properties**

CTE, linear 20°C	<u>0 µm/m-°C</u>	0 µin/in-°F	
CTE, linear 20°C Transverse to Flow	<u>44 µm/m-°C</u>	24.4 µin/in-°F	
CTE, linear 100°C	<u>0 µm/m-°C</u>	0 µin/in-°F	Flow
CTE, linear 100°C	<u>44 µm/m-°C</u>	24.4 µin/in-°F	Transverse
Melting Point	<u>320 °C</u>	608 °F	
Maximum Service Temperature, Air	<u>130 °C</u>	266 °F	
Deflection Temperature at 1.8 MPa (264 psi)	<u>215 °C</u>	419 °F	
UL RTI, Electrical	<u>130 °C</u>	266 °F	
UL RTI, Mechanical with Impact	<u>130 °C</u>	266 °F	
Flammability, UL94	V-0	V-0	
Oxygen Index	44 %	44 %	

Some of the values displayed above may have been converted from their original units and/or rounded in order to display the information in a consistent manner. For scientific or engineering calculations you can click on the property value to see the original value as well as raw conversions to equivalent units. We advise you to use one of its raw conversions in your calculations to minimize rounding error. We also ask that you refer to MatWeb's disclaimer and terms of use regarding property values for this datasheet as they were originally entered into MatWeb.

**Subscribe to Premium Services**

**Searches:** Sequential • Composition • Property • Material Type • Manufacturer • Trade Name • Unit Converter  
**Other Links:** Advertising • Submit Data • Database Licensing • Web Design & Hosting • Trade Publications • Supplier List • Unit Converter • Reference • News • Links • Help • Contact Us • Site Map •

Please read our License Agreement regarding materials data and our Privacy Policy. Questions or comments about MatWeb? Please contact us and we will appreciate your input.

Site designed and maintained by Automation Creations, Inc. The contents of this web site, the MatWeb logo, and "MatWeb" are Copyright 1998 Automation Creations, Inc. MatWeb is intended for personal, non-commercial use. The contents, results, and technical data from this site may not be reproduced either in whole or in part without permission from Automation Creations, Inc.



Data on over 31,000 metals, plastics, ceramics, and composites.

HELP WANTED! • HOME • SEARCH • TOOLS • FORUM • SERVICES • HEL

Searches: Sequential | Material Type | Property | Composition | Trade Name | Manufacturer



## Ticona Vectra® E130i Liquid Crystal Polymer (LCP), 30% Glass

[Printer friendly version](#)
[Download to Excel \(requires Excel and Windows\)](#)

**Subcategory:** Filled/Reinforced Thermoplastic; Liquid Crystal Polymer (LCP); Polymer; Thermoplastic

**Key Words:** Hoechst Celanese Corporation

**Material Notes:**

Data provided by M. A. Hanna.

No vendors are listed for this material. Please [click here](#) if you are a supplier and would like information on how to

### Physical Properties

	Metric	English
Density	<u>1.61 g/cc</u>	0.0582 lb/in <sup>3</sup>
Water Absorption	0.04 %	0.04 %
Moisture Absorption at Equilibrium	0.04 %	0.04 %
Linear Mold Shrinkage	<u>0.001 cm/cm</u>	0.001 in/in
Linear Mold Shrinkage, Transverse	<u>0.002 cm/cm</u>	0.002 in/in

### Mechanical Properties

Tensile Strength, Ultimate	<u>160 MPa</u>	23200 psi
Elongation at Break	1.6 %	1.6 %
Tensile Modulus	<u>17 GPa</u>	2470 ksi
Flexural Modulus	<u>16 GPa</u>	2320 ksi
Flexural Yield Strength	<u>230 MPa</u>	33400 psi
Compressive Yield Strength	<u>93 MPa</u>	13500 psi
Charpy Impact, Notched	<u>1.8 J/cm<sup>2</sup></u>	8.57 ft-lb/in <sup>2</sup>
Compressive Modulus	<u>14 GPa</u>	2030 ksi
Izod Impact, Notched (ISO)	<u>26 kJ/m<sup>2</sup></u>	12.4 ft-lb/in <sup>2</sup>

### Electrical Properties

Electrical Resistivity	<u>1e+012 ohm-cm</u>	1e+012 ohm-cm
Surface Resistance	1e+017 ohm	1e+017 ohm

Dielectric Constant	3.2	3.2
Dielectric Constant, Low Frequency	3.5	3.5
Dissipation Factor	0.02	0.02
Dissipation Factor, Low Frequency	0.03	0.03
Arc Resistance	<u>140 sec</u>	140 sec
Comparative Tracking Index	200 V	200 V

**Thermal Properties**

CTE, linear 20°C	<u>1 <math>\mu\text{m/m-}^\circ\text{C}</math></u>	0.556 $\mu\text{in/in-}^\circ\text{F}$	
CTE, linear 20°C Transverse to Flow	<u>73 <math>\mu\text{m/m-}^\circ\text{C}</math></u>	40.6 $\mu\text{in/in-}^\circ\text{F}$	
CTE, linear 100°C	<u>1 <math>\mu\text{m/m-}^\circ\text{C}</math></u>	0.556 $\mu\text{in/in-}^\circ\text{F}$	Flow
CTE, linear 100°C	<u>73 <math>\mu\text{m/m-}^\circ\text{C}</math></u>	40.6 $\mu\text{in/in-}^\circ\text{F}$	Transverse
Melting Point	<u>335 <math>^\circ\text{C}</math></u>	635 $^\circ\text{F}$	
Maximum Service Temperature, Air	<u>130 <math>^\circ\text{C}</math></u>	266 $^\circ\text{F}$	
Deflection Temperature at 1.8 MPa (264 psi)	<u>280 <math>^\circ\text{C}</math></u>	536 $^\circ\text{F}$	
UL RTI, Electrical	<u>130 <math>^\circ\text{C}</math></u>	266 $^\circ\text{F}$	
UL RTI, Mechanical with Impact	<u>130 <math>^\circ\text{C}</math></u>	266 $^\circ\text{F}$	
Flammability, UL94	V-0	V-0	
Oxygen Index	44 %	44 %	

Some of the values displayed above may have been converted from their original units and/or rounded in order to display the information in a consistent manner. For scientific or engineering calculations you can click on the property value to see the original value as well as raw conversions to equivalent units. We advise you to use one of its raw conversions in your calculations to minimize rounding error. We also ask that you refer to MatWeb's disclaimer and terms of use regarding property values for this datasheet as they were originally entered into MatWeb.

**Subscribe to Premium Services**

**Searches:** Sequential • Composition • Property • Material Type • Manufacturer • Trade Name • Unit Converter  
**Other Links:** Advertising • Submit Data • Database Licensing • Web Design & Hosting • Trade Publications • Supplier List • Unit Converter • Reference • News • Links • Help • Contact Us • Site Map •

Please read our License Agreement regarding materials data and our Privacy Policy. Questions or comments about MatWeb? Please contact us and we will appreciate your input.

Site designed and maintained by Automation Creations, Inc. The contents of this web site, the MatWeb logo, and "MatWeb" are Copyright 1995-2003 Automation Creations, Inc. MatWeb is intended for personal, non-commercial use. The contents, results, and technical data from this site may not be reproduced either in whole or in part without permission from Automation Creations, Inc.



Data on over 31,000 metals, plastics, ceramics, and composites.

HELP WANTED! • HOME • SEARCH • TOOLS • FORUM • SERVICES • HEL

Searches: Sequential | Material Type | Property | Composition | Trade Name | Manufacturer



## Ticona Vectra® C150 Liquid Crystal Polymer (LCP), 50% Glass I

[Printer friendly version](#)
[Download to Excel \(requires Excel and Windows\)](#)

**Subcategory:** Filled/Reinforced Thermoplastic; Liquid Crystal Polymer (LCP); Polymer; Thermoplastic

**Key Words:** Hoechst Celanese Corporation

**Material Notes:**

Data provided by M. A. Hanna.

No vendors are listed for this material. Please [click here](#) if you are a supplier and would like information on how to

### Physical Properties

	Metric	English
Density	<u>1.81 g/cc</u>	0.0654 lb/in <sup>3</sup>
Water Absorption	0.01 %	0.01 %
Moisture Absorption at Equilibrium	0.01 %	0.01 %
Linear Mold Shrinkage	<u>0.002 cm/cm</u>	0.002 in/in
Linear Mold Shrinkage, Transverse	<u>0.002 cm/cm</u>	0.002 in/in

### Mechanical Properties

Tensile Strength, Ultimate	<u>125 MPa</u>	18100 psi
Elongation at Break	1 %	1 %
Tensile Modulus	<u>24.5 GPa</u>	3550 ksi
Flexural Modulus	<u>20 GPa</u>	2900 ksi
Flexural Yield Strength	<u>205 MPa</u>	29700 psi
Compressive Yield Strength	<u>152 MPa</u>	22000 psi
Charpy Impact, Notched	<u>1.2 J/cm<sup>2</sup></u>	5.71 ft-lb/in <sup>2</sup>
Compressive Modulus	<u>20.5 GPa</u>	2970 ksi
Izod Impact, Notched (ISO)	<u>10 kJ/m<sup>2</sup></u>	4.76 ft-lb/in <sup>2</sup>

### Electrical Properties

Electrical Resistivity	<u>1e+012 ohm-cm</u>	1e+012 ohm-cm
Surface Resistance	1e+017 ohm	1e+017 ohm

Dielectric Constant	4	4
Dielectric Constant, Low Frequency	4.5	4.5
Dissipation Factor	0.009	0.009
Dissipation Factor, Low Frequency	0.02	0.02
Arc Resistance	<u>182 sec</u>	182 sec
Comparative Tracking Index	250 V	250 V

**Thermal Properties**

CTE, linear 20°C	<u>2 µm/m-°C</u>	1.11 µin/in-°F	
CTE, linear 20°C Transverse to Flow	<u>64 µm/m-°C</u>	35.6 µin/in-°F	
CTE, linear 100°C	<u>2 µm/m-°C</u>	1.11 µin/in-°F	Flow
CTE, linear 100°C	<u>64 µm/m-°C</u>	35.6 µin/in-°F	Transverse
Melting Point	<u>325 °C</u>	617 °F	
Maximum Service Temperature, Air	<u>220 °C</u>	428 °F	220/200°C
Deflection Temperature at 1.8 MPa (264 psi)	<u>255 °C</u>	491 °F	
UL RTI, Electrical	<u>220 °C</u>	428 °F	
UL RTI, Mechanical with Impact	<u>200 °C</u>	392 °F	
Flammability, UL94	V-0	V-0	

Some of the values displayed above may have been converted from their original units and/or rounded in order to display the information in a consistent format. For scientific or engineering calculations you can click on the property value to see the original value as well as raw conversions to equivalent units. We advise you to use one of its raw conversions in your calculations to minimize rounding error. We also ask that you refer to MatWeb's disclaimer and terms of use regarding property values for this datasheet as they were originally entered into MatWeb.

**Subscribe to Premium Services**

**Searches:** Sequential • Composition • Property • Material Type • Manufacturer • Trade Name • Unit Converter  
**Other Links:** Advertising • Submit Data • Database Licensing • Web Design & Hosting • Trade Publications • Supplier List • Unit Converter • Reference • News • Links • Help • Contact Us • Site Map •

Please read our License Agreement regarding materials data and our Privacy Policy. Questions or comments about MatWeb? Please contact us and we will appreciate your input.

Site designed and maintained by Automation Creations, Inc. The contents of this web site, the MatWeb logo, and "MatWeb" are Copyright 1998-2003 Automation Creations, Inc. MatWeb is intended for personal, non-commercial use. The contents, results, and technical data from this site may not be reproduced either in whole or in part without permission from Automation Creations, Inc.



Data on over 31,000 metals, plastics, ceramics, and composites.

HELP WANTED! • HOME • SEARCH • TOOLS • FORUM • SERVICES • HEL

Searches: Sequential | Material Type | Property | Composition | Trade Name | Manufacturer



## Ticona Vectra® C130 Liquid Crystal Polymer (LCP), 30% Glass I

[Printer friendly version](#)
[Download to Excel \(requires Excel and Windows\)](#)
**Subcategory:** Filled/Reinforced Thermoplastic; Liquid Crystal Polymer (LCP); Polymer; Thermoplastic**Key Words:** Hoechst Celanese Corporation**Material Notes:**

Data provided by M. A. Hanna.

No vendors are listed for this material. Please [click here](#) if you are a supplier and would like information on how to

Physical Properties	Metric	English
Density	<u>1.62 g/cc</u>	0.0585 lb/in <sup>3</sup>
Water Absorption	0.02 %	0.02 %
Moisture Absorption at Equilibrium	0.02 %	0.02 %
Linear Mold Shrinkage	<u>0.001 cm/cm</u>	0.001 in/in
Linear Mold Shrinkage, Transverse	<u>0.002 cm/cm</u>	0.002 in/in

**Mechanical Properties**

Tensile Strength, Ultimate	<u>160 MPa</u>	23200 psi
Elongation at Break	1.9 %	1.9 %
Tensile Modulus	<u>15 GPa</u>	2180 ksi
Flexural Modulus	<u>14 GPa</u>	2030 ksi
Flexural Yield Strength	<u>245 MPa</u>	35500 psi
Compressive Yield Strength	<u>139 MPa</u>	20200 psi
Charpy Impact, Notched	<u>1.6 J/cm<sup>2</sup></u>	7.61 ft-lb/in <sup>2</sup>
Tensile Impact Strength	<u>70 kJ/m<sup>2</sup></u>	33.3 ft-lb/in <sup>2</sup>
Compressive Modulus	<u>22 GPa</u>	3190 ksi
Izod Impact, Notched (ISO)	<u>20 kJ/m<sup>2</sup></u>	9.52 ft-lb/in <sup>2</sup>

**Electrical Properties**

Electrical Resistivity	<u>1e+012 ohm-cm</u>	1e+012 ohm-cm
------------------------	----------------------	---------------

Surface Resistance	1e+016 ohm	1e+016 ohm
Dielectric Constant	3.4	3.4
Dielectric Constant, Low Frequency	3.8	3.8
Dissipation Factor	0.009	0.009
Dissipation Factor, Low Frequency	0.02	0.02
Arc Resistance	<u>182 sec</u>	182 sec
Comparative Tracking Index	200 V	200 V

**Thermal Properties**

CTE, linear 20°C	<u>3 µm/m-°C</u>	1.67 µin/in-°F	
CTE, linear 20°C Transverse to Flow	<u>58 µm/m-°C</u>	32.2 µin/in-°F	
CTE, linear 100°C	<u>3 µm/m-°C</u>	1.67 µin/in-°F	Flow
CTE, linear 100°C	<u>58 µm/m-°C</u>	32.2 µin/in-°F	Transverse
Melting Point	<u>325 °C</u>	617 °F	
Maximum Service Temperature, Air	<u>240 °C</u>	464 °F	240/220°C (460/430°F)
Deflection Temperature at 0.46 MPa (66 psi)	<u>284 °C</u>	543 °F	
Deflection Temperature at 1.8 MPa (264 psi)	<u>255 °C</u>	491 °F	
Vicat Softening Point	<u>252 °C</u>	486 °F	
UL RTI, Electrical	<u>240 °C</u>	464 °F	
UL RTI, Mechanical with Impact	<u>220 °C</u>	428 °F	
Flammability, UL94	V-0	V-0	
Oxygen Index	44 %	44 %	

Some of the values displayed above may have been converted from their original units and/or rounded in order to display the information in a consistent manner. For scientific or engineering calculations you can click on the property value to see the original value as well as raw conversions to equivalent units. We advise you to use one of its raw conversions in your calculations to minimize rounding error. We also ask that you refer to MatWeb's disclaimer and terms of use regarding property values for this datasheet as they were originally entered into MatWeb.

**Subscribe to Premium Services**

**Searches:** Sequential • Composition • Property • Material Type • Manufacturer • Trade Name • Unit  
**Other Links:** Advertising • Submit Data • Database Licensing • Web Design & Hosting • Trade Publication  
 Supplier List • Unit Converter • Reference • News • Links • Help • Contact Us • Site Map •

Please read our License Agreement regarding materials data and our Privacy Policy. Questions or comments about MatWeb? Please contact us and we will appreciate your input.

Site designed and maintained by Automation Creations, Inc. The contents of this web site, the MatWeb logo, and "MatWeb" are Copyright 1998 Automation Creations, Inc. MatWeb is intended for personal, non-commercial use. The contents, results, and technical data from this site may not be reproduced either in whole or in part without permission from Automation Creations, Inc.





Data on over 31,000 metals, plastics, ceramics, and composites.

HELP WANTED! • HOME • SEARCH • TOOLS • FORUM • SERVICES • HEL

Searches: Sequential | Material Type | Property | Composition | Trade Name | Manufacturer



## Ticona Vectra® C115 Liquid Crystal Polymer (LCP), 15% Glass I

[Printer friendly version](#)
[Download to Excel \(requires Excel and Windows\)](#)
**Subcategory:** Filled/Reinforced Thermoplastic; Liquid Crystal Polymer (LCP); Polymer; Thermoplastic**Key Words:** Hoechst Celanese Corporation**Material Notes:**

Data provided by M. A. Hanna.

No vendors are listed for this material. Please [click here](#) if you are a supplier and would like information on how to**Physical Properties**

	<b>Metric</b>	<b>English</b>
Density	<u>1.5 g/cc</u>	0.0542 lb/in <sup>3</sup>
Water Absorption	0.02 %	0.02 %
Moisture Absorption at Equilibrium	0.02 %	0.02 %
Linear Mold Shrinkage	<u>0 cm/cm</u>	0 in/in
Linear Mold Shrinkage, Transverse	<u>0.002 cm/cm</u>	0.002 in/in

**Mechanical Properties**

Tensile Strength, Ultimate	<u>160 MPa</u>	23200 psi
Elongation at Break	2.5 %	2.5 %
Tensile Modulus	<u>14 GPa</u>	2030 ksi
Flexural Modulus	<u>12 GPa</u>	1740 ksi
Flexural Yield Strength	<u>200 MPa</u>	29000 psi
Compressive Yield Strength	<u>82 MPa</u>	11900 psi
Charpy Impact, Notched	<u>3 J/cm<sup>2</sup></u>	14.3 ft-lb/in <sup>2</sup>
Compressive Modulus	<u>11 GPa</u>	1600 ksi
Izod Impact, Notched (ISO)	<u>30 kJ/m<sup>2</sup></u>	14.3 ft-lb/in <sup>2</sup>

**Electrical Properties**

Electrical Resistivity	<u>1e+012 ohm-cm</u>	1e+012 ohm-cm
Surface Resistance	1e+017 ohm	1e+017 ohm

Dielectric Constant	3.1	3.1
Dielectric Constant, Low Frequency	3.4	3.4
Dissipation Factor	0.01	0.01
Dissipation Factor, Low Frequency	0.03	0.03
Arc Resistance	<u>135 sec</u>	135 sec
Comparative Tracking Index	150 V	150 V

**Thermal Properties**

CTE, linear 20°C	<u>-3 <math>\mu\text{m/m-}^\circ\text{C}</math></u>	-1.67 $\mu\text{in/in-}^\circ\text{F}$	
CTE, linear 20°C Transverse to Flow	<u>66 <math>\mu\text{m/m-}^\circ\text{C}</math></u>	36.7 $\mu\text{in/in-}^\circ\text{F}$	
CTE, linear 100°C	<u>-3 <math>\mu\text{m/m-}^\circ\text{C}</math></u>	-1.67 $\mu\text{in/in-}^\circ\text{F}$	Flow
CTE, linear 100°C	<u>66 <math>\mu\text{m/m-}^\circ\text{C}</math></u>	36.7 $\mu\text{in/in-}^\circ\text{F}$	Transverse
Melting Point	<u>325 <math>^\circ\text{C}</math></u>	617 $^\circ\text{F}$	
Maximum Service Temperature, Air	<u>240 <math>^\circ\text{C}</math></u>	464 $^\circ\text{F}$	240/200°C (460/400°F)
Deflection Temperature at 1.8 MPa (264 psi)	<u>245 <math>^\circ\text{C}</math></u>	473 $^\circ\text{F}$	
UL RTI, Electrical	<u>240 <math>^\circ\text{C}</math></u>	464 $^\circ\text{F}$	
UL RTI, Mechanical with Impact	<u>220 <math>^\circ\text{C}</math></u>	428 $^\circ\text{F}$	
Flammability, UL94	V-0	V-0	

Some of the values displayed above may have been converted from their original units and/or rounded in order to display the information in a consistent format. For scientific or engineering calculations you can click on the property value to see the original value as well as raw conversions to equivalent units. We advise you to use one of its raw conversions in your calculations to minimize rounding error. We also ask that you refer to MatWeb's disclaimer and terms of use regarding property values for this datasheet as they were originally entered into MatWeb.

**Subscribe to Premium Services**

**Searches:** Sequential • Composition • Property • Material Type • Manufacturer • Trade Name • Unit Converter  
**Other Links:** Advertising • Submit Data • Database Licensing • Web Design & Hosting • Trade Publications • Supplier List • Unit Converter • Reference • News • Links • Help • Contact Us • Site Map •

Please read our License Agreement regarding materials data and our Privacy Policy. Questions or comments about MatWeb? Please contact us and we will appreciate your input.

Site designed and maintained by Automation Creations, Inc. The contents of this web site, the MatWeb logo, and "MatWeb" are Copyright 1998-2003 Automation Creations, Inc. MatWeb is intended for personal, non-commercial use. The contents, results, and technical data from this site may not be reproduced either in whole or in part without permission from Automation Creations, Inc.



Data on over 31,000 metals, plastics, ceramics, and composites.

[HELP WANTED!](#) • [HOME](#) • [SEARCH](#) • [TOOLS](#) • [FORUM](#) • [SERVICES](#) • [HEL](#)[Searches:](#) Sequential | Material Type | Property | Composition | Trade Name | Manufacturer

## Ticona Vectra® B130 Liquid Crystal Polymer (LCP), 30% Glass I

[Printer friendly version](#) [Download to Excel \(requires Excel and Windows\)](#)**Subcategory:** Filled/Reinforced Thermoplastic; Liquid Crystal Polymer (LCP); Polymer; Thermoplastic**Key Words:** Hoechst Celanese Corporation**Material Notes:**

Data provided by M. A. Hanna.

No vendors are listed for this material. Please [click here](#) if you are a supplier and would like information on how to**Physical Properties**

	Metric	English
Density	<u>1.6 g/cc</u>	0.0578 lb/in <sup>3</sup>
Water Absorption	0.02 %	0.02 %
Moisture Absorption at Equilibrium	0.02 %	0.02 %
Linear Mold Shrinkage	<u>0 cm/cm</u>	0 in/in
Linear Mold Shrinkage, Transverse	<u>0.001 cm/cm</u>	0.001 in/in

**Mechanical Properties**

Tensile Strength, Ultimate	<u>190 MPa</u>	27600 psi
Elongation at Break	1 %	1 %
Tensile Modulus	<u>20 GPa</u>	2900 ksi
Flexural Modulus	<u>17 GPa</u>	2470 ksi
Flexural Yield Strength	<u>300 MPa</u>	43500 psi
Compressive Yield Strength	<u>150 MPa</u>	21800 psi
Charpy Impact, Notched	<u>1.3 J/cm<sup>2</sup></u>	6.19 ft-lb/in <sup>2</sup>
Tensile Impact Strength	<u>50 kJ/m<sup>2</sup></u>	23.8 ft-lb/in <sup>2</sup>
Compressive Modulus	<u>21.5 GPa</u>	3120 ksi
Izod Impact, Notched (ISO)	<u>12 kJ/m<sup>2</sup></u>	5.71 ft-lb/in <sup>2</sup>

**Electrical Properties**

Electrical Resistivity	<u>1e+012 ohm-cm</u>	1e+012 ohm-cm
------------------------	----------------------	---------------

Surface Resistance	1e+017 ohm	1e+017 ohm
Dielectric Constant	3.5	3.5
Dielectric Constant, Low Frequency	3.7	3.7
Dissipation Factor	0.006	0.006
Dissipation Factor, Low Frequency	0.01	0.01
Arc Resistance	<u>124 sec</u>	124 sec
Comparative Tracking Index	175 V	175 V

**Thermal Properties**

CTE, linear 20°C	<u>1 µm/m-°C</u>	0.556 µin/in-°F	
CTE, linear 20°C Transverse to Flow	<u>53 µm/m-°C</u>	29.4 µin/in-°F	
CTE, linear 100°C	<u>1 µm/m-°C</u>	0.556 µin/in-°F	Flow
CTE, linear 100°C	<u>53 µm/m-°C</u>	29.4 µin/in-°F	Transverse
Melting Point	<u>280 °C</u>	536 °F	
Maximum Service Temperature, Air	<u>130 °C</u>	266 °F	
Deflection Temperature at 1.8 MPa (264 psi)	<u>235 °C</u>	455 °F	
Vicat Softening Point	<u>243 °C</u>	469 °F	
UL RTI, Electrical	<u>130 °C</u>	266 °F	
UL RTI, Mechanical with Impact	<u>130 °C</u>	266 °F	
Flammability, UL94	V-0	V-0	
Oxygen Index	51 %	51 %	

Some of the values displayed above may have been converted from their original units and/or rounded in order to display the information in a consistent manner. For scientific or engineering calculations, you can click on the property value to see the original value as well as raw conversions to equivalent units. We advise you to use one of its raw conversions in your calculations to minimize rounding error. We also ask that you refer to MatWeb's disclaimer and terms of use regarding property values for this datasheet as they were originally entered into MatWeb.

**Subscribe to Premium Services**

**Searches:** Sequential • Composition • Property • Material Type • Manufacturer • Trade Name • Unit Converter  
**Other Links:** Advertising • Submit Data • Database Licensing • Web Design & Hosting • Trade Publications • Supplier List • Unit Converter • Reference • News • Links • Help • Contact Us • Site Map •

Please read our License Agreement regarding materials data and our Privacy Policy. Questions or comments about MatWeb? Please contact us and we will appreciate your input.

Site designed and maintained by Automation Creations, Inc. The contents of this web site, the MatWeb logo, and "MatWeb" are Copyright 1995-2003 Automation Creations, Inc. MatWeb is intended for personal, non-commercial use. The contents, results, and technical data from this site may not be reproduced either in whole or in part without permission from Automation Creations, Inc.



Data on over 31,000 metals, plastics, ceramics, and composites.

HELP WANTED! • HOME • SEARCH • TOOLS • FORUM • SERVICES • HEL

Searches: Sequential | Material Type | Property | Composition | Trade Name | Manufacturer



## Ticona Vectra® A150 Liquid Crystal Polymer (LCP), 50% Glass I

[Printer friendly version](#)
[Download to Excel \(requires Excel and Windows\)](#)

**Subcategory:** Filled/Reinforced Thermoplastic; Liquid Crystal Polymer (LCP); Polymer; Thermoplastic

**Key Words:** Hoechst Celanese Corporation

**Material Notes:**

Data provided by M. A. Hanna.

No vendors are listed for this material. Please [click here](#) if you are a supplier and would like information on how to

### Physical Properties

	Metric	English
Density	<u>1.79 g/cc</u>	0.0647 lb/in <sup>3</sup>
Water Absorption	0.01 %	0.01 %
Moisture Absorption at Equilibrium	0.01 %	0.01 %
Linear Mold Shrinkage	<u>0.002 cm/cm</u>	0.002 in/in
Linear Mold Shrinkage, Transverse	<u>0.002 cm/cm</u>	0.002 in/in

### Mechanical Properties

Hardness, Rockwell M	93	93
Tensile Strength, Ultimate	<u>160 MPa</u>	23200 psi
Elongation at Break	1.3 %	1.3 %
Tensile Modulus	<u>24.5 GPa</u>	3550 ksi
Flexural Modulus	<u>21 GPa</u>	3050 ksi
Flexural Yield Strength	<u>250 MPa</u>	36300 psi
Compressive Yield Strength	<u>140 MPa</u>	20300 psi
Charpy Impact, Notched	<u>1.2 J/cm<sup>2</sup></u>	5.71 ft-lb/in <sup>2</sup>
Tensile Impact Strength	<u>50 kJ/m<sup>2</sup></u>	23.8 ft-lb/in <sup>2</sup>
Compressive Modulus	<u>21 GPa</u>	3050 ksi
Coefficient of Friction	0.19	0.19
Izod Impact, Notched (ISO)	<u>12 kJ/m<sup>2</sup></u>	5.71 ft-lb/in <sup>2</sup>

**Electrical Properties**

Electrical Resistivity	<u>1e+012 ohm-cm</u>	1e+012 ohm-cm
Surface Resistance	1e+016 ohm	1e+016 ohm
Dielectric Constant	4	4
Dielectric Constant, Low Frequency	4.5	4.5
Dissipation Factor	0.008	0.008
Dissipation Factor, Low Frequency	0.02	0.02
Arc Resistance	<u>180 sec</u>	180 sec
Comparative Tracking Index	175 V	175 V

**Thermal Properties**

CTE, linear 20°C	<u>3 µm/m-°C</u>	1.67 µin/in-°F	
CTE, linear 20°C Transverse to Flow	<u>64 µm/m-°C</u>	35.6 µin/in-°F	
CTE, linear 100°C	<u>3 µm/m-°C</u>	1.67 µin/in-°F	Flow
CTE, linear 100°C	<u>64 µm/m-°C</u>	35.6 µin/in-°F	Transverse
Melting Point	<u>280 °C</u>	536 °F	
Maximum Service Temperature, Air	<u>220 °C</u>	428 °F	220/220°C
Deflection Temperature at 0.46 MPa (66 psi)	<u>252 °C</u>	486 °F	
Deflection Temperature at 1.8 MPa (264 psi)	<u>240 °C</u>	464 °F	
Vicat Softening Point	<u>235 °C</u>	455 °F	
UL RTI, Electrical	<u>220 °C</u>	428 °F	
UL RTI, Mechanical with Impact	<u>220 °C</u>	428 °F	
Flammability, UL94	V-0	V-0	

Some of the values displayed above may have been converted from their original units and/or rounded in order to display the information in a consistent manner. For scientific or engineering calculations you can click on the property value to see the original value as well as raw conversions to equivalent units. We advise you to use one of its raw conversions in your calculations to minimize rounding error. We also ask that you refer to MatWeb's disclaimer and terms of use regarding property values for this datasheet as they were originally entered into MatWeb.

**Subscribe to Premium Services**

**Searches:** Sequential • Composition • Property • Material Type • Manufacturer • Trade Name • UL  
**Other Links:** Advertising • Submit Data • Database Licensing • Web Design & Hosting • Trade Publication  
 Supplier List • Unit Converter • Reference • News • Links • Help • Contact Us • Site Map •

Please read our License Agreement regarding materials data and our Privacy Policy. Questions or comments about MatWeb? Please contact us and we will appreciate your input.

Site designed and maintained by Automation Creations, Inc. The contents of this web site, the MatWeb logo, and "MatWeb" are Copyright 1995 Automation Creations, Inc. MatWeb is intended for personal, non-commercial use. The contents, results, and technical data from this site may not be reproduced either in whole or in part without permission from Automation Creations, Inc.



Data on over 31,000 metals, plastics, ceramics, and composites.

HELP WANTED! • HOME • SEARCH • TOOLS • FORUM • SERVICES • HEL

Searches: Sequential | Material Type | Property | Composition | Trade Name | Manufacturer



## Ticona Vectra® A130 Liquid Crystal Polymer (LCP), 30% Glass I

[Printer friendly version](#)
[Download to Excel \(requires Excel and Windows\)](#)
**Subcategory:** Filled/Reinforced Thermoplastic; Liquid Crystal Polymer (LCP); Polymer; Thermoplastic**Key Words:** Hoechst Celanese Corporation**Material Notes:**

Data provided by M. A. Hanna.

No vendors are listed for this material. Please [click here](#) if you are a supplier and would like information on how to**Physical Properties**

	<b>Metric</b>	<b>English</b>
Density	<u>1.62 g/cc</u>	0.0585 lb/in <sup>3</sup>
Water Absorption	0.02 %	0.02 %
Moisture Absorption at Equilibrium	0.02 %	0.02 %
Linear Mold Shrinkage	<u>0.001 cm/cm</u>	0.001 in/in
Linear Mold Shrinkage, Transverse	<u>0.002 cm/cm</u>	0.002 in/in

**Mechanical Properties**

Hardness, Rockwell M	87	87
Tensile Strength, Ultimate	<u>190 MPa</u>	27600 psi
Elongation at Break	2.3 %	2.3 %
Tensile Modulus	<u>16 GPa</u>	2320 ksi
Flexural Modulus	<u>15 GPa</u>	2180 ksi
Flexural Yield Strength	<u>280 MPa</u>	40600 psi
Compressive Yield Strength	<u>100 MPa</u>	14500 psi
Charpy Impact, Notched	<u>4 J/cm<sup>2</sup></u>	19 ft-lb/in <sup>2</sup>
Tensile Impact Strength	<u>80 kJ/m<sup>2</sup></u>	38.1 ft-lb/in <sup>2</sup>
Compressive Modulus	<u>14.5 GPa</u>	2100 ksi
Coefficient of Friction	0.14	0.14
Izod Impact, Notched (ISO)	<u>26 kJ/m<sup>2</sup></u>	12.4 ft-lb/in <sup>2</sup>

**Electrical Properties**

Electrical Resistivity	<u>1e+012 ohm-cm</u>	1e+012 ohm-cm
Surface Resistance	1e+017 ohm	1e+017 ohm
Dielectric Constant	3.2	3.2
Dielectric Constant, Low Frequency	3.7	3.7
Dissipation Factor	0.008	0.008
Dissipation Factor, Low Frequency	0.02	0.02
Arc Resistance	<u>140 sec</u>	140 sec
Comparative Tracking Index	175 V	175 V

**Thermal Properties**

CTE, linear 20°C	<u>0 µm/m-°C</u>	0 µin/in-°F	
CTE, linear 20°C Transverse to Flow	<u>79 µm/m-°C</u>	43.9 µin/in-°F	
CTE, linear 100°C	<u>0 µm/m-°C</u>	0 µin/in-°F	Flow
CTE, linear 100°C	<u>79 µm/m-°C</u>	43.9 µin/in-°F	Transverse
Melting Point	<u>280 °C</u>	536 °F	
Maximum Service Temperature, Air	<u>240 °C</u>	464 °F	240/220°C (460/430°F)
Deflection Temperature at 0.46 MPa (66 psi)	<u>252 °C</u>	486 °F	
Deflection Temperature at 1.8 MPa (264 psi)	<u>235 °C</u>	455 °F	
Vicat Softening Point	<u>232 °C</u>	450 °F	
UL RTI, Electrical	<u>240 °C</u>	464 °F	
UL RTI, Mechanical with Impact	<u>220 °C</u>	428 °F	
Flammability, UL94	V-0	V-0	
Oxygen Index	43 %	43 %	

Some of the values displayed above may have been converted from their original units and/or rounded in order to display the information in a consistent manner. For scientific or engineering calculations you can click on the property value to see the original value as well as raw conversions to equivalent units. We advise you to use one of its raw conversions in your calculations to minimize rounding error. We also ask that you refer to MatWeb's disclaimer and terms of use regarding property values for this datasheet as they were originally entered into MatWeb.

**Subscribe to Premium Services**

**Searches:** Sequential • Composition • Property • Material Type • Manufacturer • Trade Name • Unit  
**Other Links:** Advertising • Submit Data • Database Licensing • Web Design & Hosting • Trade Publications  
 Supplier List • Unit Converter • Reference • News • Links • Help • Contact Us • Site Map •

Please read our License Agreement regarding materials data and our Privacy Policy. Questions or comments about MatWeb? Please contact us and we will appreciate your input.

Site designed and maintained by Automation Creations, Inc. The contents of this web site, the MatWeb logo, and "MatWeb" are Copyright 1998 Automation Creations, Inc. MatWeb is intended for personal, non-commercial use. The contents, results, and technical data from this site may not be reproduced either in whole or in part without permission from Automation Creations, Inc.





Data on over 31,000 metals, plastics, ceramics, and composites.

HELP WANTED! • HOME • SEARCH • TOOLS • FORUM • SERVICES • HEL

Searches: Sequential | Material Type | Property | Composition | Trade Name | Manufacturer



## Ticona Vectra® A115 Liquid Crystal Polymer (LCP), 15% Glass I

[Printer friendly version](#)
[Download to Excel \(requires Excel and Windows\)](#)

**Subcategory:** Filled/Reinforced Thermoplastic; Liquid Crystal Polymer (LCP); Polymer; Thermoplastic

**Key Words:** Hoechst Celanese Corporation

**Material Notes:**

Data provided by M. A. Hanna.

No vendors are listed for this material. Please [click here](#) if you are a supplier and would like information on how to

Physical Properties	Metric	English
Density	<u>1.5 g/cc</u>	0.0542 lb/in <sup>3</sup>
Water Absorption	0.02 %	0.02 %
Moisture Absorption at Equilibrium	0.02 %	0.02 %
Linear Mold Shrinkage	<u>0 cm/cm</u>	0 in/in
Linear Mold Shrinkage, Transverse	<u>0.002 cm/cm</u>	0.002 in/in

**Mechanical Properties**

Tensile Strength, Ultimate	<u>200 MPa</u>	29000 psi
Elongation at Break	3.3 %	3.3 %
Tensile Modulus	<u>14 GPa</u>	2030 ksi
Flexural Modulus	<u>12 GPa</u>	1740 ksi
Flexural Yield Strength	<u>240 MPa</u>	34800 psi
Compressive Yield Strength	<u>85 MPa</u>	12300 psi
Charpy Impact, Notched	<u>5.5 J/cm<sup>2</sup></u>	26.2 ft-lb/in <sup>2</sup>
Tensile Impact Strength	<u>80 kJ/m<sup>2</sup></u>	38.1 ft-lb/in <sup>2</sup>
Compressive Modulus	<u>10 GPa</u>	1450 ksi
Coefficient of Friction	0.11	0.11
Izod Impact, Notched (ISO)	<u>55 kJ/m<sup>2</sup></u>	26.2 ft-lb/in <sup>2</sup>

**Electrical Properties**

Electrical Resistivity	<u>1e+012 ohm-cm</u>	1e+012 ohm-cm
Surface Resistance	1e+017 ohm	1e+017 ohm
Dielectric Constant	2.9	2.9
Dielectric Constant, Low Frequency	3.3	3.3
Dissipation Factor	0.008	0.008
Dissipation Factor, Low Frequency	0.02	0.02
Arc Resistance	<u>135 sec</u>	135 sec
Comparative Tracking Index	200 V	200 V

**Thermal Properties**

CTE, linear 20°C	<u>-5 µm/m-°C</u>	-2.78 µin/in-°F	
CTE, linear 20°C Transverse to Flow	<u>89 µm/m-°C</u>	49.4 µin/in-°F	
CTE, linear 100°C	<u>-5 µm/m-°C</u>	-2.78 µin/in-°F	Flow
CTE, linear 100°C	<u>89 µm/m-°C</u>	49.4 µin/in-°F	Transverse
Melting Point	<u>280 °C</u>	536 °F	
Maximum Service Temperature, Air	<u>240 °C</u>	464 °F	240/220°C (460/430°F)
Deflection Temperature at 1.8 MPa (264 psi)	<u>230 °C</u>	446 °F	
UL RTI, Electrical	<u>240 °C</u>	464 °F	
UL RTI, Mechanical with Impact	<u>220 °C</u>	428 °F	
Flammability, UL94	V-0	V-0	

Some of the values displayed above may have been converted from their original units and/or rounded in order to display the information in a consistent manner. For scientific or engineering calculations you can click on the property value to see the original value as well as raw conversions to equivalent units. We advise you to use one of its raw conversions in your calculations to minimize rounding error. We also ask that you refer to MatWeb's disclaimer and terms of use regarding property values for this datasheet as they were originally entered into MatWeb.

**Subscribe to Premium Services**

**Searches:** Sequential • Composition • Property • Material Type • Manufacturer • Trade Name • Unit Converter  
**Other Links:** Advertising • Submit Data • Database Licensing • Web Design & Hosting • Trade Publications • Supplier List • Unit Converter • Reference • News • Links • Help • Contact Us • Site Map •

Please read our License Agreement regarding materials data and our Privacy Policy. Questions or comments about MatWeb? Please contact us and we will appreciate your input.

Site designed and maintained by Automation Creations, Inc. The contents of this web site, the MatWeb logo, and "MatWeb" are Copyright 1998-2003 Automation Creations, Inc. MatWeb is intended for personal, non-commercial use. The contents, results, and technical data from this site may not be reproduced either in whole or in part without permission from Automation Creations, Inc.

# Ticona


[Search](#)
[Company](#)
[Media](#)
[Investor Relations](#)
[Internet Policy](#)
[Contacts](#)
[Help](#)
[Product](#)
[Information](#)
[Markets/  
Applications](#)
[Technology  
& Services](#)
[Customer  
Center](#)
[Literature](#)
[MyTicona](#)
[Best Viewing Tips](#)
[Go To Ticona Global](#)

## Product Information

> Data Sheet Selector > Query Results

Data sheet selector allows you to view a Ticona data sheets for any available grade by selecting a Ticona product and a Ticona grade category.


[Data Sheet](#)

[MSDS](#)

[Literature](#)

[Search](#)

Select a product.

VECTRA liquid crystal polymer (LCP)

Select a grade category.

ALL

» Quer

Press ▾ to sort column in ascer

Grade ▾	Description ▾ (Category: Description)
A950	Unfilled: suitable for extrusion, USP class VI compliant
C115	Glass Reinforced: 15% glass fiber, higher temperature capability & easier flow
A115	Glass Reinforced: 15% glass fiber, Provides easier flow than A130, Tougher
E130i	Glass Reinforced: 30% glass fiber, excellent flow, high temperature capability
B130	Glass Reinforced: 30% glass fiber, extremely low CLTE and shrinkage
L130	Glass Reinforced: 30% glass fiber, general purpose LCP
C130	Glass Reinforced: 30% glass fiber, higher temp. capability & easier flow than A130
H130	Glass Reinforced: 30% glass fiber, highest temperature capability
A130	Glass Reinforced: 30% glass fiber, USP class VI compliant, exc. bal. of properties
L140	Glass Reinforced: 40% glass fiber, general purpose LCP
H140	Glass Reinforced: 40% glass fiber, highest temperature capability
A150	Glass Reinforced: 50% glass fiber, improved creep resistance over A130
C150	Glass Reinforced: 50% glass fiber, improved creep resistance over C130
T130	Glass Reinforced: An easily processable LCP with very high temperature capability. Glass Filled
A515	Mineral Reinforced: 15% mineral, USP class VI compliant
A530	Mineral Reinforced: 30% mineral, USP class VI compliant, hydrolytically stable
E530i	Mineral Reinforced: 30% mineral, excellent flow, high temperature capability
C550	Mineral Reinforced: 50% mineral, suitable for higher temperature
A410	Mineral / Glass Reinforced: 25% glass/25% mineral. low warpage
A725	Specialty: 25% filled, conductive grade
A625	Specialty: 25% graphite, good wear characteristics
A230	Specialty: 30% carbon fiber, USP Class VI compliant, conductive
B230	Specialty: 30% carbon fiber, exceptional strength and stiffness, conductive
A700	Specialty: 30% glass fiber, suitable for electrostatic dissipation (ESD)
D130M	Specialty: 30% milled glass, very high flow, suitable for encapsulation
E820i Pd	Specialty: 40 % mineral, excellent flow, electrolytic metal platable
E820i	Specialty: 40% mineral, excellent flow, electrolytic metal platable
C810	Specialty: Glass/mineral, electroplatable, withstands reflow soldering
A435	Specialty: Glass/PTFE, best high High Arc Ignition performance
A430	Specialty: LCP/PTFE, excellent wear & electrical prop. at hi freq





© 2000 Ticona  
A business of Celanese AG